ROAD DESIGN - PRELIMINARY DESIGN DRAWINGS

Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

Standards profile: US - AASHTO Green Book 2018 / FHWA Design speed 50 km/h

SHEET INDEX

Sheet	Title	Drawing No.
1 of 38	Cover, sheet index and general notes	G-001
2 of 38	Route alternatives and selection	C-101
3 of 38	Plan and profile	C-102
4 of 38	Typical sections	C-301
5 of 38	Superelevation diagram	C-601
6 of 38	Pavement and subgrade details	C-501
7 of 38	Cross sections (1 of 7)	C-302
8 of 38	Cross sections (2 of 7)	C-303
9 of 38	Cross sections (3 of 7)	C-304
10 of 38	Cross sections (4 of 7)	C-305
11 of 38	Cross sections (5 of 7)	C-306
12 of 38	Cross sections (6 of 7)	C-307
13 of 38	Cross sections (7 of 7)	C-308
14 of 38	Roadside protection layout	C-103
15 of 38	Pipe plan/profile Storm	C-104
16 of 38	Pipe plan/profile Sanitary	C-105
17 of 38	Drainage details and structure schedule	C-502
18 of 38	Mass haul and quantities	C-602
19 of 38	Locality plan	C-001
20 of 38	Intersection layout and sight distance	C-106
21 of 38	Drainage area map and hydrology data	C-701
22 of 38	Culvert layout, section and schedule	C-603
23 of 38	Slope stability - critical slip circles	C-702
24 of 38	Subsurface (pavement) drainage	C-503
25 of 38	Retaining wall type selection	C-703
26 of 38	Retaining wall stem reinforcement	C-704
27 of 38	Signing and pavement marking (concept)	C-504
28 of 38	Road lighting layout (concept)	C-107
29 of 38	Utility plan and conflict register	C-604
30 of 38	Right-of-way / land requirement plan	C-108
31 of 38	Erosion and sediment control plan (concept)	C-109
32 of 38	Landscape concept	C-110
33 of 38	Temporary traffic management staging (concept)	C-705
34 of 38	Traffic signals: warrant, phasing and timing (X1 at 0+570.00)	C-706
35 of 38	Capacity and level of service (concept)	C-605
36 of 38	Rigid pavement (AGPT02 Ch. 9 structure, concept)	C-505
37 of 38	Constructability: sequence and risks	C-707
38 of 38	Standard details atlas (references)	C-506

GENERAL NOTES

1. Design to US - AASHTO Green Book 2018 / FHWA - parameter register lists each value as verified (from the published standard), formula, or engineer input.
2. Values from copyrighted or paywalled tables are not shipped with the software; they are entered by the engineer and marked as engineer inputs in the parameter register and design report.
3. Dimensions in metres unless noted; elevations in metres on the survey datum; stations in km+m along the control line.
4. Existing ground from the supplied survey/terrain points (TIN). Verify on site before construction.
5. Earthwork volumes by average end area with a composite-grid cross check; shrink/bulk factors and haul limits as stated in the earthwork report.
6. Standard details are schematic references; construct to the cited agency standard drawings and specification.
7. These drawings are generated by agent tools from the audit-logged design. Status: PRELIMINARY unless the engineer has recorded approval; sealing is the engineer's act.
8. Selected route: A-direct (recorded with reasons in the audit log).

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Cover, sheet index and general notes

DRAWING / SHEET No.
G-001

SHEET / REVISION / DATE OF ISSUE
Sheet 1 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved


PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 6639279720 9ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.

Scale NTS (not to scale)

NOTES / KEY PLAN

PROFESSIONAL ENGINEER SEAL

NO SEAL - PRELIMINARY

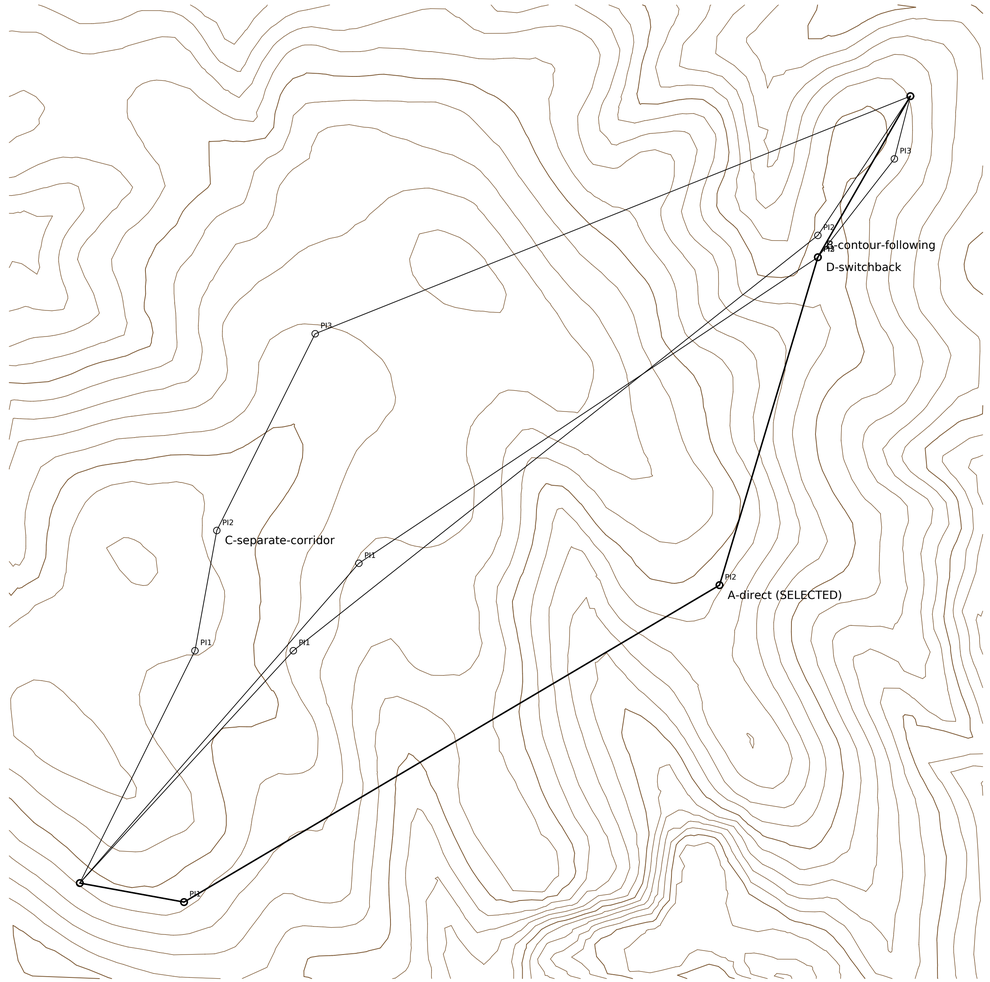

Alternative	Length m	Min R m	Max grade %	Cut m3	Fill m3	Imbalance m3	Wall conc. m3	Mandatory fails	Cost proxy
A-direct	1136	180	8.00	22618	51310	-30954	6581	0	317776
B-contour-following	1053	200	8.00	44606	69366	-29221	6293	0	346578
C-separate-corridor	1129	185	8.00	20967	100404	-81533	77824	2	2578395
D-switchback	1064	150	8.00	40433	68291	-31901	9787	0	450179

Selection rule: fewest mandatory geometry failures, then lowest cost proxy (unit rates are agent placeholders unless the engineer enters rates)
- vs B-contour-following: cost proxy 317776 vs 346578 (-8.3%), length 1136 vs 1053 m, cut+fill 73928 vs 113972 m³, imbalance -30954 vs -29221 m³, wall concrete 6581 vs 6293 m³, max grade 8.0 vs 8.0 %, mandatory failures 0 vs 0
- vs C-separate-corridor: cost proxy 317776 vs 2578395 (-87.7%), length 1136 vs 1129 m, cut+fill 73928 vs 121371 m³, imbalance -30954 vs -81533 m³, wall concrete 6581 vs 77824 m³, max grade 8.0 vs 8.0 %, mandatory failures 0 vs 2
- vs D-switchback: cost proxy 317776 vs 450179 (-29.4%), length 1136 vs 1064 m, cut+fill 73928 vs 108724 m³, imbalance -30954 vs -31901 m³, wall concrete 6581 vs 9787 m³, max grade 8.0 vs 8.0 %, mandatory failures 0 vs 0
Cost proxy uses placeholder unit rates unless the engineer enters rates; it ranks alternatives and is not an estimate. Least-cost search on a 10 m grid, 16 headings, grade penalty above the profile maximum.

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Route alternatives and selection

DRAWING / SHEET No.
C-101

SHEET / REVISION / DATE OF ISSUE
Sheet 2 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 66392797209ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.

Scale 1:2500

N


0 100 200 m

NOTES / KEY PLAN


PROFESSIONAL ENGINEER SEAL

NO SEAL - PRELIMINARY

PLAN 1:4000 contours 1 m (index 5 m) N↑

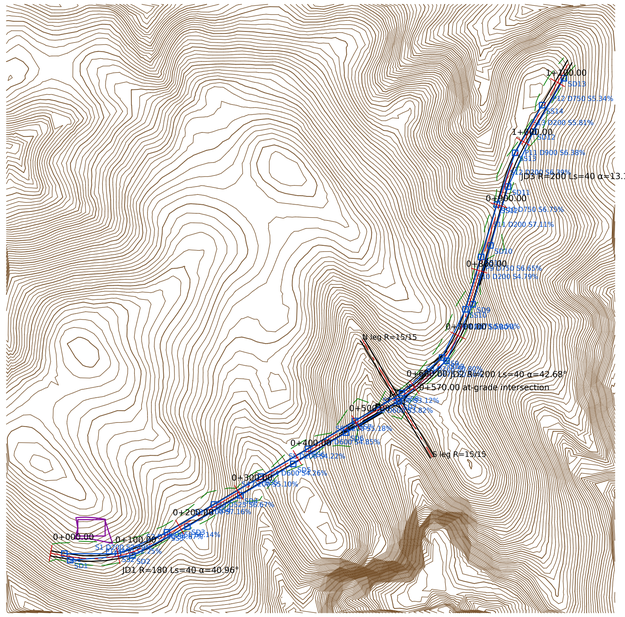

PROFILE H 1:1829 V 1:348 (existing ground brown, finished grade red)

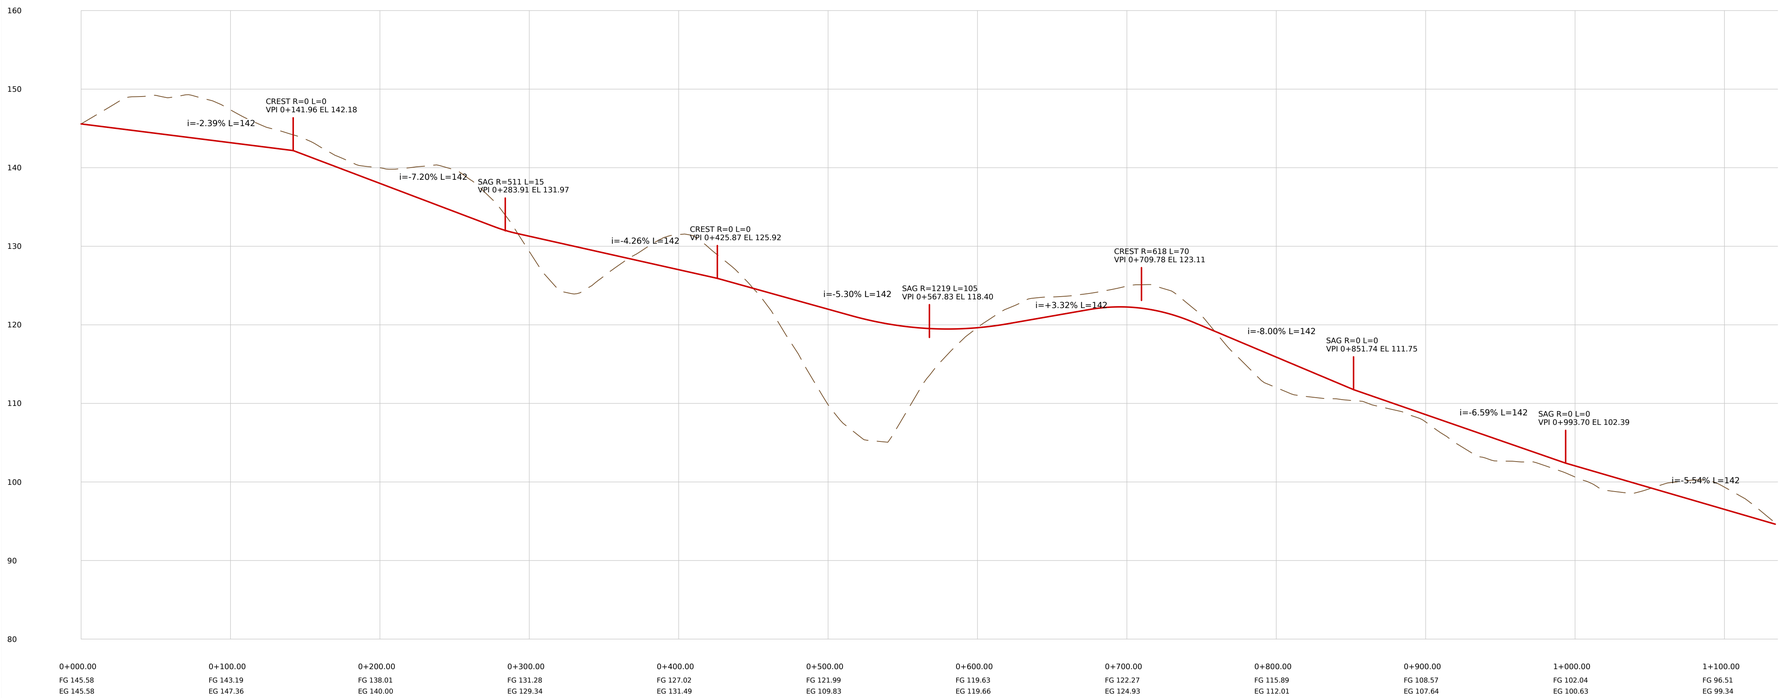

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Plan and profile

DRAWING / SHEET No.
C-102

SHEET / REVISION / DATE OF ISSUE
Sheet 3 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 6639279720 9ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.

Scale plan 1:4000; profile as shown

N


0 100 200 m

NOTES / KEY PLAN


PROFESSIONAL ENGINEER SEAL

NO SEAL - PRELIMINARY

TYPICAL SECTION IN CUT

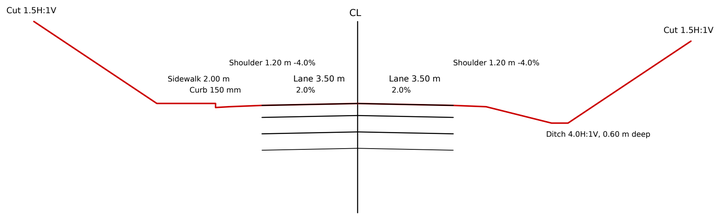

TYPICAL SECTION IN FILL

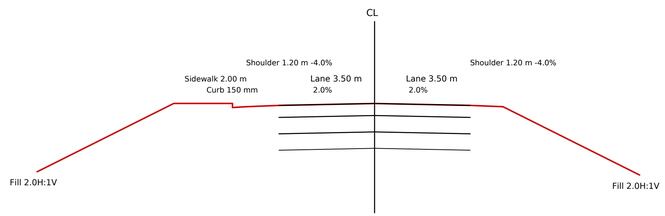

Layer (top to bottom)	Thickness mm
Asphalt concrete	110
Aggregate base	150
Aggregate subbase	150

Pavement layer lines are drawn at 4x vertical exaggeration for legibility. Side slopes shown for a nominal 3.0 m cut / 2.5 m fill height; actual daylight per cross sections. Barrier, lining and protection treatments per the protection layout sheet.

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Typical sections

DRAWING / SHEET No.
C-301

SHEET / REVISION / DATE OF ISSUE
Sheet 4 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 6639279720 9ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.

Scale 1:100


0 5 10 m

NOTES / KEY PLAN

PROFESSIONAL ENGINEER SEAL

NO SEAL - PRELIMINARY

Right edge cross slope
Left edge cross slope (rise per run outward from CL)

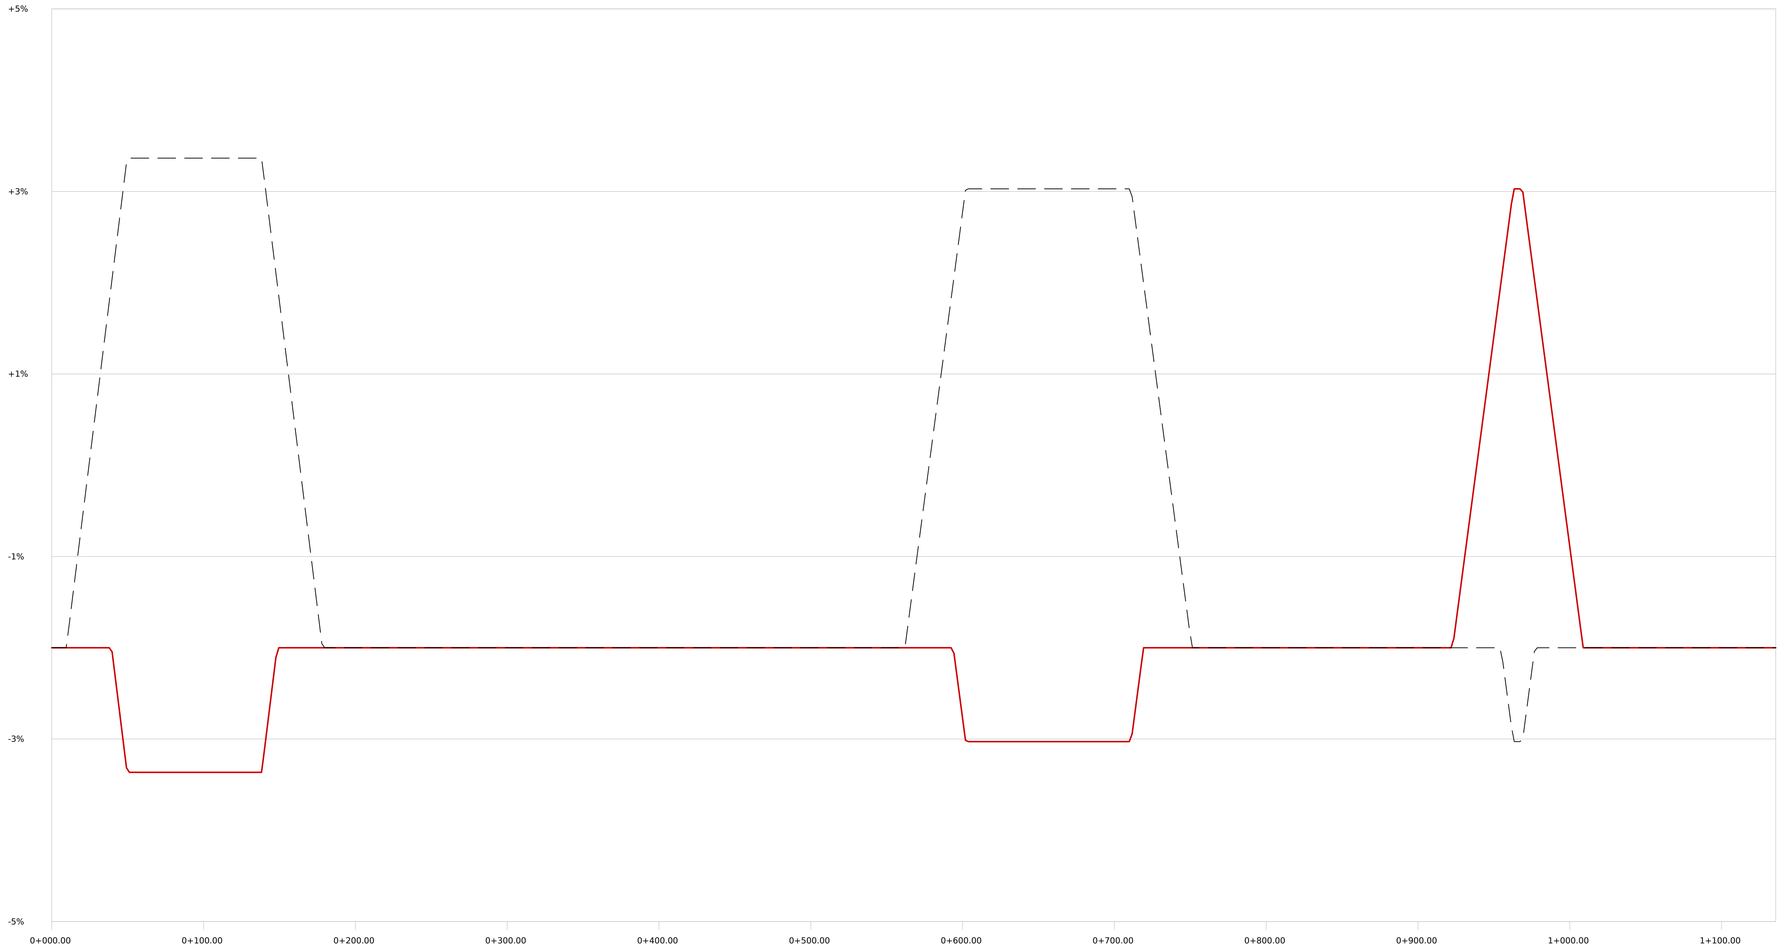

Curve	R m	e	Method	Runoff start	Full e	Full e end	Runoff end	Rel. gradient %
1	180	0.034	proportional distribution (AASHTO Method 1): e = emax·Rmin/R = 0.034·75.0...	0+049.58	0+049.58	0+138.25	0+178.25	0.469
2	200	0.030	proportional distribution (AASHTO Method 1): e = emax·Rmin/R = 0.030·75.0...	0+573.02	0+602.02	0+711.01	0+751.01	0.440
3	200	0.030	proportional distribution (AASHTO Method 1): e = emax·Rmin/R = 0.030·75.0...	0+923.37	0+962.83	0+968.80	1+008.80	0.440

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Superelevation diagram

DRAWING / SHEET No.
C-601

SHEET / REVISION / DATE OF ISSUE
Sheet 5 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 6639279720 9ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.


Scale H 1:as shown; V as shown (not to scale)

NOTES / KEY PLAN

PROFESSIONAL ENGINEER SEAL

NO SEAL - PRELIMINARY

PAVEMENT STRUCTURE (FLEXIBLE)

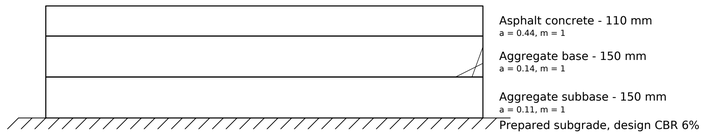


Total thickness 410 mm

DESIGN BASIS

Method: AASHTO 1993 flexible: structural number with layered analysis (AASHTO Guide for Design of Pavement Structures (1993), Part II Ch. 3 (flexible design equation, layered design analysis))
Structural number required 2.91, provided 3.38
- SN over subgrade (Mr = 9000 psi) = 2.91
- Asphalt concrete: SN required above the layer below = 1.87; D = (SN − ΣSN_above)/(a·m) = (1.87 − 0.00)/(0.44·1.00) = 4.24 in → 110 mm (min 75 mm); SN provided so far 1.91
- Aggregate base: SN required above the layer below = 2.43; D = (SN − ΣSN_above)/(a·m) = (2.43 − 1.91)/(0.14·1.00) = 3.73 in → 150 mm (min 150 mm); SN provided so far 2.73
- Aggregate subbase: SN required above the layer below = 2.91; D = (SN − ΣSN_above)/(a·m) = (2.91 − 2.73)/(0.11·1.00) = 1.64 in → 150 mm (min 150 mm); SN provided so far 3.38

Engineer inputs: reliability ZR; overall standard deviation S0; initial/terminal serviceability p0/pt; layer coefficients a_i, drainage m_i, layer moduli
Note: subgrade Mr from Mr(psi) = 1500·CBR (AASHTO 1993 correlation); confirm with tests

SUBGRADE PREPARATION (SCHEMATIC)

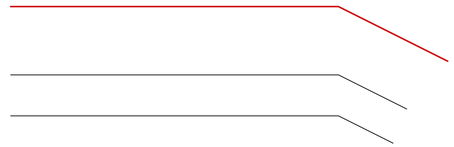

Strip topsoil and unsuitable material; proof-roll exposed subgrade.
Scarify and recompact the top 300 mm (dashed) to the specified density.
Replace soft spots identified by proof-rolling (engineer to direct).
Subgrade drains where the geotechnical report requires them.
Density, moisture and CBR testing per the governing specification.

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Pavement and subgrade details

DRAWING / SHEET No.
C-501

SHEET / REVISION / DATE OF ISSUE
Sheet 6 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 66392797209ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.

Scale 1:10 (layers)


0 0.5 1 m

NOTES / KEY PLAN

PROFESSIONAL ENGINEER SEAL


NO SEAL - PRELIMINARY

STA 0+000.00




FG 145.58 EG 145.58 cut 18.3 m² fill 7.9 m²
cross slope L -2.00% R -2.00% daylight L 13.6 R 12.7 m

STA 0+009.58




FG 145.35 EG 146.65 cut 45.0 m² fill 0.2 m²
cross slope L -2.00% R -2.00% daylight L 17.0 R 7.3 m

STA 0+020.00




FG 145.10 EG 147.84 cut 77.0 m² fill 0.0 m²
cross slope L -2.00% R -0.60% daylight L 19.1 R 7.4 m

STA 0+040.00




FG 144.62 EG 149.06 cut 124.3 m² fill 0.0 m²
cross slope L -2.08% R +2.08% daylight L 24.3 R 9.1 m

STA 0+049.58




FG 144.39 EG 149.23 cut 137.5 m² fill 0.0 m²
cross slope L -3.36% R +3.36% daylight L 24.8 R 9.6 m

STA 0+060.00




FG 144.14 EG 148.95 cut 137.9 m² fill 0.0 m²
cross slope L -3.36% R +3.36% daylight L 24.8 R 9.9 m

STA 0+080.00




FG 143.66 EG 148.90 cut 137.4 m² fill 0.0 m²
cross slope L -3.36% R +3.36% daylight L 23.6 R 10.8 m

STA 0+100.00




FG 143.19 EG 147.36 cut 107.1 m² fill 0.0 m²
cross slope L -3.36% R +3.36% daylight L 19.9 R 10.0 m

STA 0+120.00




FG 142.71 EG 145.48 cut 74.1 m² fill 0.0 m²
cross slope L -3.36% R +3.36% daylight L 18.7 R 8.0 m

STA 0+138.25




FG 142.27 EG 144.40 cut 60.7 m² fill 0.0 m²
cross slope L -3.36% R +3.36% daylight L 17.9 R 6.8 m

STA 0+140.00



FG 142.23 EG 144.29 cut 58.9 m² fill 0.0 m²
cross slope L -3.13% R +3.13% daylight L 17.6 R 6.7 m

STA 0+160.00



FG 140.88 EG 142.65 cut 48.5 m² fill 0.0 m²
cross slope L -2.00% R +0.45% daylight L 16.3 R 6.6 m

CROSS SECTIONS 1:400 (red = cut, green = fill, green line = subgrade datum)

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Cross sections

DRAWING / SHEET No.
C-302

SHEET / REVISION / DATE OF ISSUE
Sheet 7 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 66392797209ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.


Scale AS SHOWN (not to scale)

NOTES / KEY PLAN

PROFESSIONAL ENGINEER SEAL


NO SEAL - PRELIMINARY

STA 0+178.25




FG 139.57 EG 140.92 cut 34.4 m² fill 0.0 m²
cross slope L -2.00% R -2.00% daylight L 13.8 R 6.5 m

STA 0+180.00




FG 139.45 EG 140.77 cut 33.4 m² fill 0.0 m²
cross slope L -2.00% R -2.00% daylight L 13.6 R 6.5 m

STA 0+200.00




FG 138.01 EG 140.00 cut 43.9 m² fill 0.0 m²
cross slope L -2.00% R -2.00% daylight L 13.6 R 7.6 m

STA 0+220.00




FG 136.57 EG 140.00 cut 79.3 m² fill 0.0 m²
cross slope L -2.00% R -2.00% daylight L 15.9 R 10.5 m

STA 0+240.00

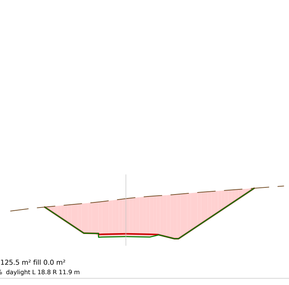


FG 135.13 EG 140.28 cut 125.5 m² fill 0.0 m²
cross slope L -2.00% R -2.00% daylight L 18.8 R 11.9 m

STA 0+260.00

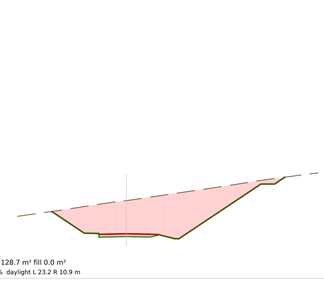


FG 133.69 EG 138.54 cut 128.7 m² fill 0.0 m²
cross slope L -2.00% R -2.00% daylight L 23.2 R 10.9 m

STA 0+276.41

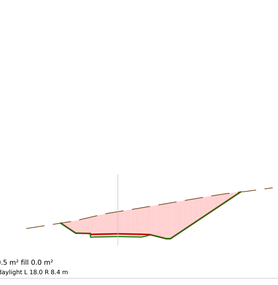


FG 132.50 EG 135.74 cut 80.5 m² fill 0.0 m²
cross slope L -2.00% R -2.00% daylight L 18.0 R 8.4 m

STA 0+280.00

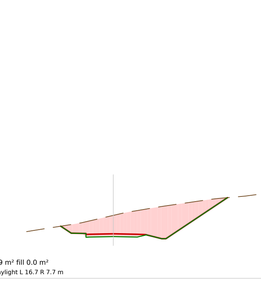


FG 132.26 EG 134.96 cut 66.9 m² fill 0.0 m²
cross slope L -2.00% R -2.00% daylight L 16.7 R 7.7 m

STA 0+291.41

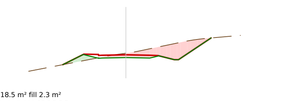


FG 131.65 EG 131.87 cut 18.5 m² fill 2.3 m²
cross slope L -2.00% R -2.00% daylight L 12.5 R 9.2 m

STA 0+300.00

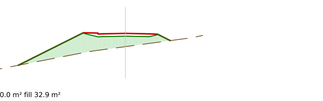


FG 131.28 EG 129.34 cut 0.0 m² fill 32.9 m²
cross slope L -2.00% R -2.00% daylight L 6.6 R 15.7 m

STA 0+320.00

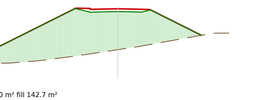

FG 130.43 EG 124.44 cut 0.0 m² fill 142.7 m²
cross slope L -2.00% R -2.00% daylight L 12.2 R 25.7 m

STA 0+340.00

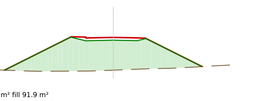

FG 129.58 EG 124.78 cut 0.0 m² fill 91.9 m²
cross slope L -2.00% R -2.00% daylight L 13.0 R 15.9 m

CROSS SECTIONS 1:400 (red = cut, green = fill, green line = subgrade datum)

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Cross sections

DRAWING / SHEET No.
C-303

SHEET / REVISION / DATE OF ISSUE
Sheet 8 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 66392797209ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.

Scale AS SHOWN (not to scale)

NOTES / KEY PLAN


PROFESSIONAL ENGINEER SEAL

NO SEAL - PRELIMINARY

STA 0+360.00


FG 128.72 EG 127.60 cut 0.0 m² fill 10.2 m²
cross slope L -2.00% R -2.00% daylight L 6.9 R 8.2 m

STA 0+380.00




FG 127.87 EG 130.04 cut 44.6 m² fill 0.0 m²
cross slope L -2.00% R -2.00% daylight L 11.7 R 9.9 m

STA 0+400.00




FG 127.02 EG 131.49 cut 104.5 m² fill 0.0 m²
cross slope L -2.00% R -2.00% daylight L 15.9 R 12.9 m

STA 0+420.00




FG 126.17 EG 129.85 cut 88.4 m² fill 0.0 m²
cross slope L -2.00% R -2.00% daylight L 16.5 R 10.5 m

STA 0+440.00




FG 125.17 EG 126.64 cut 36.0 m² fill 0.0 m²
cross slope L -2.00% R -2.00% daylight L 13.6 R 6.8 m

STA 0+460.00




FG 124.11 EG 122.28 cut 0.0 m² fill 30.3 m²
cross slope L -2.00% R -2.00% daylight L 6.0 R 14.6 m

STA 0+480.00




FG 123.05 EG 116.32 cut 0.0 m² fill 184.3 m²
cross slope L -2.00% R -2.00% daylight L 14.0 R 29.4 m

STA 0+500.00




FG 121.99 EG 109.83 cut 0.0 m² fill 234.0 m²
cross slope L -2.00% R -2.00% daylight L 23.5 R 6.7 m

STA 0+515.33

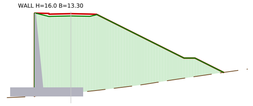


FG 121.18 EG 106.67 cut 0.0 m² fill 319.4 m²
cross slope L -2.00% R -2.00% daylight L 28.0 R 6.7 m

STA 0+520.00

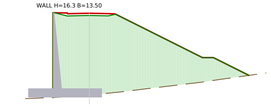


FG 120.94 EG 105.97 cut 0.0 m² fill 339.7 m²
cross slope L -2.00% R -2.00% daylight L 29.2 R 6.7 m

STA 0+540.00



FG 120.12 EG 105.05 cut 0.0 m² fill 174.1 m²
cross slope L -2.00% R -2.00% daylight L 5.2 R 6.7 m

STA 0+560.00

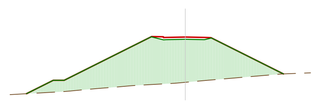

FG 119.63 EG 111.35 cut 0.0 m² fill 232.8 m²
cross slope L -2.00% R -2.00% daylight L 18.0 R 29.1 m

CROSS SECTIONS 1:500 (red = cut, green = fill, green line = subgrade datum)

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Cross sections

DRAWING / SHEET No.
C-304

SHEET / REVISION / DATE OF ISSUE
Sheet 9 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 66392797209ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.


Scale AS SHOWN (not to scale)

NOTES / KEY PLAN

PROFESSIONAL ENGINEER SEAL


NO SEAL - PRELIMINARY

STA 0+562.02




FG 119.60 EG 111.99 cut 0.0 m² fill 204.2 m²
cross slope L -2.00% R -2.00% daylight L 16.8 R 27.8 m

STA 0+580.00




FG 119.47 EG 116.23 cut 0.0 m² fill 57.7 m²
cross slope L -2.00% R +0.26% daylight L 9.0 R 16.1 m

STA 0+600.00



FG 119.63 EG 119.66 cut 10.4 m² fill 2.0 m²
cross slope L -2.77% R +2.77% daylight L 10.9 R 8.5 m

STA 0+602.02



FG 119.67 EG 119.95 cut 14.3 m² fill 1.1 m²
cross slope L -3.03% R +3.03% daylight L 11.3 R 7.8 m

STA 0+620.00

FG 120.13 EG 122.07 cut 45.7 m² fill 0.0 m²
cross slope L -3.03% R +3.03% daylight L 14.4 R 7.4 m

STA 0+620.33

FG 120.14 EG 122.09 cut 46.1 m² fill 0.0 m²
cross slope L -3.03% R +3.03% daylight L 14.5 R 7.4 m


STA 0+640.00

FG 120.79 EG 123.44 cut 64.0 m² fill 0.0 m²
cross slope L -3.03% R +3.03% daylight L 16.5 R 7.9 m

STA 0+660.00


FG 121.45 EG 123.66 cut 58.1 m² fill 0.0 m²
cross slope L -3.03% R +3.03% daylight L 16.6 R 7.1 m

STA 0+674.78




FG 121.95 EG 124.00 cut 56.6 m² fill 0.0 m²
cross slope L -3.03% R +3.03% daylight L 17.2 R 6.6 m

STA 0+680.00




FG 122.10 EG 124.15 cut 57.4 m² fill 0.0 m²
cross slope L -3.03% R +3.03% daylight L 17.4 R 6.6 m

STA 0+700.00



FG 122.27 EG 124.93 cut 74.7 m² fill 0.0 m²
cross slope L -3.03% R +3.03% daylight L 19.0 R 7.3 m

STA 0+711.01



FG 122.09 EG 125.11 cut 85.1 m² fill 0.0 m²
cross slope L -3.03% R +3.03% daylight L 19.9 R 7.7 m

CROSS SECTIONS 1:400 (red = cut, green = fill, green line = subgrade datum)

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Cross sections

DRAWING / SHEET No.
C-305

SHEET / REVISION / DATE OF ISSUE
Sheet 10 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 66392797209ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.


Scale AS SHOWN (not to scale)

NOTES / KEY PLAN

PROFESSIONAL ENGINEER SEAL


NO SEAL - PRELIMINARY

STA 0+720.00




FG 121.79 EG 124.88 cut 86.7 m² fill 0.0 m²
cross slope L -2.00% R +1.90% daylight L 19.7 R 7.6 m

STA 0+740.00




FG 120.67 EG 122.81 cut 60.7 m² fill 0.0 m²
cross slope L -2.00% R -0.62% daylight L 17.7 R 6.6 m

STA 0+744.78



FG 120.31 EG 122.06 cut 50.4 m² fill 0.0 m²
cross slope L -2.00% R -1.22% daylight L 16.7 R 6.2 m

STA 0+751.01



FG 119.81 EG 120.97 cut 36.1 m² fill 0.8 m²
cross slope L -2.00% R -2.00% daylight L 15.0 R 8.6 m

STA 0+760.00

FG 119.09 EG 118.90 cut 13.7 m² fill 10.9 m²
cross slope L -2.00% R -2.00% daylight L 12.4 R 14.6 m

STA 0+780.00

FG 117.49 EG 114.82 cut 0.0 m² fill 30.4 m²
cross slope L -2.00% R -2.00% daylight L 6.7 R 6.7 m


STA 0+800.00

FG 115.89 EG 112.01 cut 0.0 m² fill 46.9 m²
cross slope L -2.00% R -2.00% daylight L 7.9 R 6.7 m

STA 0+820.00


FG 114.29 EG 110.88 cut 0.0 m² fill 40.5 m²
cross slope L -2.00% R -2.00% daylight L 7.4 R 6.7 m

STA 0+840.00




FG 112.69 EG 110.59 cut 0.0 m² fill 53.3 m²
cross slope L -2.00% R -2.00% daylight L 5.8 R 26.4 m

STA 0+860.00




FG 111.21 EG 110.11 cut 3.6 m² fill 22.1 m²
cross slope L -2.00% R -2.00% daylight L 10.1 R 16.2 m

STA 0+880.00



FG 109.89 EG 109.12 cut 3.8 m² fill 12.4 m²
cross slope L -2.00% R -2.00% daylight L 9.6 R 11.9 m

STA 0+900.00



FG 108.57 EG 107.64 cut 0.0 m² fill 9.9 m²
cross slope L -2.00% R -2.00% daylight L 6.3 R 9.3 m

CROSS SECTIONS 1:400 (red = cut, green = fill, green line = subgrade datum)

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Cross sections

DRAWING / SHEET No.
C-306

SHEET / REVISION / DATE OF ISSUE
Sheet 11 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 66392797209ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.


Scale AS SHOWN (not to scale)

NOTES / KEY PLAN

PROFESSIONAL ENGINEER SEAL


NO SEAL - PRELIMINARY

STA 0+920.00




FG 107.25 EG 104.96 cut 0.0 m² fill 30.9 m²
cross slope L -2.00% R -2.00% daylight L 9.4 R 10.6 m

STA 0+922.83




FG 107.06 EG 104.63 cut 0.0 m² fill 34.3 m²
cross slope L -2.00% R -2.00% daylight L 10.2 R 10.6 m

STA 0+940.00




FG 105.93 EG 103.04 cut 0.0 m² fill 52.0 m²
cross slope L +0.16% R -2.00% daylight L 15.2 R 11.1 m

STA 0+960.00




FG 104.61 EG 102.61 cut 0.0 m² fill 34.7 m²
cross slope L +2.67% R -2.67% daylight L 14.0 R 9.7 m

STA 0+962.83

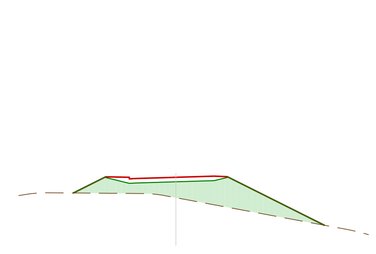


FG 104.43 EG 102.56 cut 0.0 m² fill 31.3 m²
cross slope L +3.03% R -3.03% daylight L 13.6 R 9.4 m

STA 0+968.80

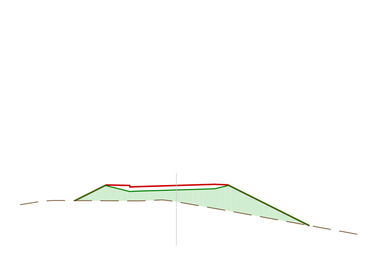


FG 104.03 EG 102.55 cut 0.0 m² fill 24.6 m²
cross slope L +3.03% R -3.03% daylight L 12.1 R 9.3 m

STA 0+980.00

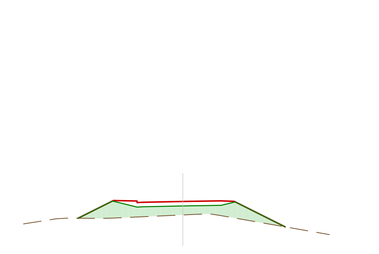


FG 103.30 EG 102.06 cut 0.0 m² fill 16.7 m²
cross slope L +1.62% R -2.00% daylight L 9.4 R 9.6 m

STA 1+000.00

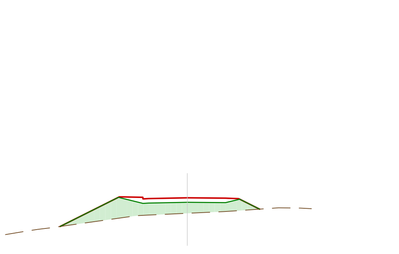


FG 102.04 EG 100.63 cut 0.0 m² fill 18.1 m²
cross slope L -0.89% R -2.00% daylight L 6.6 R 11.6 m

STA 1+008.80

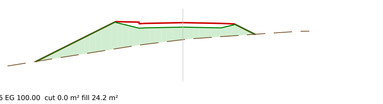


FG 101.56 EG 100.00 cut 0.0 m² fill 24.2 m²
cross slope L -2.00% R -2.00% daylight L 6.6 R 13.4 m

STA 1+020.00

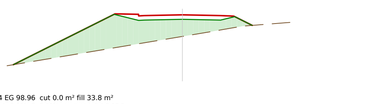


FG 100.94 EG 98.96 cut 0.0 m² fill 33.8 m²
cross slope L -2.00% R -2.00% daylight L 6.4 R 15.5 m

STA 1+040.00

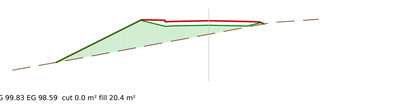

FG 99.83 EG 98.59 cut 0.0 m² fill 20.4 m²
cross slope L -2.00% R -2.00% daylight L 5.0 R 14.0 m

STA 1+060.00

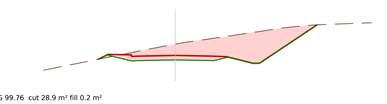

FG 98.72 EG 99.76 cut 28.9 m² fill 0.2 m²
cross slope L -2.00% R -2.00% daylight L 13.0 R 7.0 m

CROSS SECTIONS 1:250 (red = cut, green = fill, green line = subgrade datum)

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Cross sections

DRAWING / SHEET No.
C-307

SHEET / REVISION / DATE OF ISSUE
Sheet 12 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved


PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 66392797209ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.


Scale AS SHOWN (not to scale)


NOTES / KEY PLAN


PROFESSIONAL ENGINEER SEAL

NO SEAL - PRELIMINARY

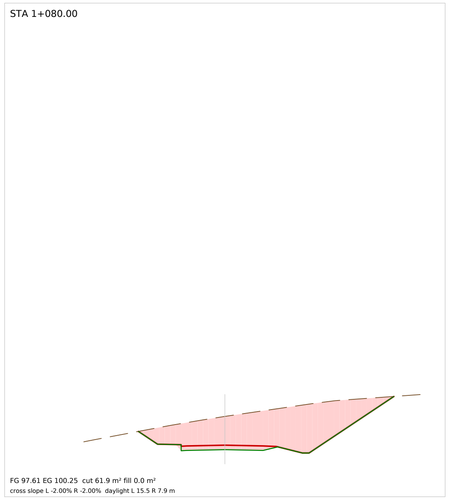

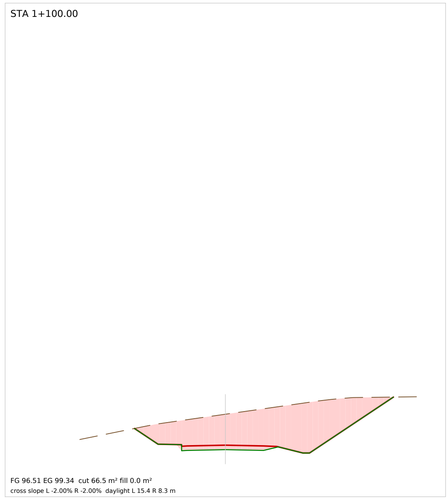

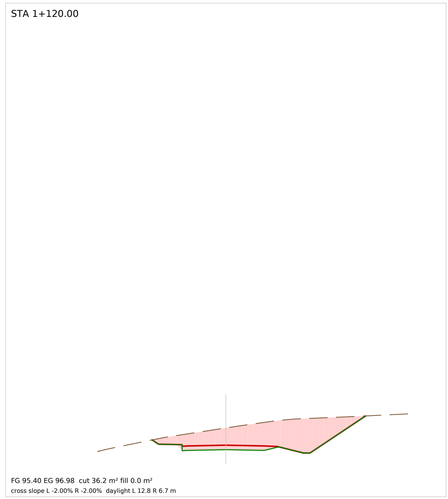

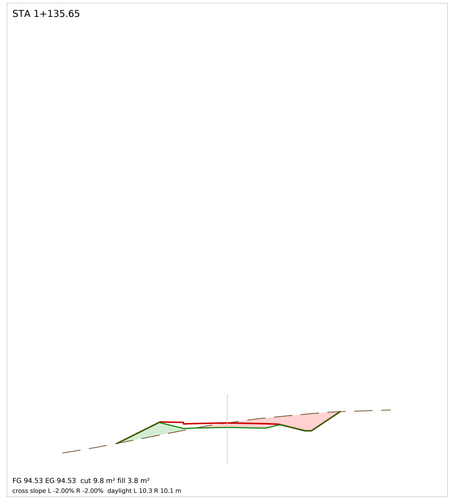

CROSS SECTIONS 1:250 (red = cut, green = fill, green line = subgrade datum)

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Cross sections

DRAWING / SHEET No.
C-308

SHEET / REVISION / DATE OF ISSUE
Sheet 13 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 66392797209ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.


Scale AS SHOWN (not to scale)

NOTES / KEY PLAN

PROFESSIONAL ENGINEER SEAL

NO SEAL - PRELIMINARY

Ticks: hazards inside the clear zone (embankment above warrant height, steep slopes, walls). Thick lines: barrier runs incl. length of need. Blue: ditch lining reaches.

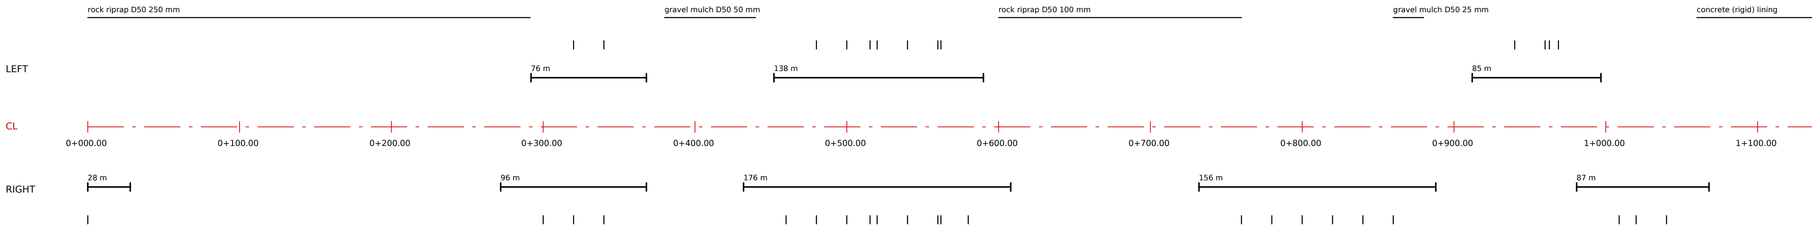

Side	From	To	Length m	LON m	Type	Reason
left	0+292.00	0+368.00	76	28.0	W-beam guardrail	critical fill slope
left	0+452.00	0+590.02	138	28.0	W-beam guardrail	critical fill slope; retaining wall drop-off
left	0+912.00	0+996.80	85	28.0	W-beam guardrail	critical fill slope
right	0+000.00	0+028.00	28	28.0	W-beam guardrail	critical fill slope
right	0+272.00	0+368.00	96	28.0	W-beam guardrail	critical fill slope
right	0+432.00	0+608.00	176	28.0	W-beam guardrail	critical fill slope; retaining wall drop-off
right	0+732.00	0+888.00	156	28.0	W-beam guardrail	critical fill slope; retaining wall drop-off
right	0+980.80	1+068.00	87	28.0	W-beam guardrail	critical fill slope

Side	From	To	Q m3/s	Depth m	V m/s	Slope %	tau_d N/m2	Lining	tau_p N/m2
left	0+000.00	0+291.41	0.000	0.00	1.49	7277.59	221.3	rock riprap D50 250 mm	297
left	0+380.00	0+440.00	0.017	0.05	0.45	5.30	26.1	gravel mulch D50 50 mm	38
left	0+600.00	0+760.00	0.044	0.08	0.67	8.00	63.5	rock riprap D50 100 mm	76
left	0+860.00	0+880.00	0.006	0.02	0.36	6.59	15.0	gravel mulch D50 25 mm	19
left	1+060.00	1+135.65	0.021	0.00	11.13	4729.39	1439.2	concrete (rigid) lining	rigid

Clear zone 5 m (engineer input from AASHTO Roadside Design Guide Table 3-1 for the design speed, ADT and slopes (demo value)); recoverable ≤ 1V:4H, traversable ≤ 1V:3H, embankment warrant height 3 m: engineer inputs.
right 10: non-recoverable fill slope 1V:2.0H inside the clear zone; clear run-out area needed at the toe
left 300: non-recoverable fill slope 1V:2.0H inside the clear zone; clear run-out area needed at the toe
left 360: non-recoverable fill slope 1V:2.0H inside the clear zone; clear run-out area needed at the toe
right 360: non-recoverable fill slope 1V:2.0H inside the clear zone; clear run-out area needed at the toe
left 460: non-recoverable fill slope 1V:2.0H inside the clear zone; clear run-out area needed at the toe

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Roadside protection layout (straight-line diagram)

DRAWING / SHEET No.
C-103

SHEET / REVISION / DATE OF ISSUE
Sheet 14 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 6639279720 9ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.

Scale H 1:1800

N

0 100 200 m


NOTES / KEY PLAN

PROFESSIONAL ENGINEER SEAL

NO SEAL - PRELIMINARY

PIPE PROFILE - Storm H 1:1773 V 1:119

cyan = HGL, red = EGL, brown = rim; method FHWA HEC-22 approximate method: outfall HGL = max(tailwater, invert + (dc+D)/2); full flow: HGL_up = HGL_dn + Sf·L, Sf = (Qn/(A R^(2/3)))²; partial flow: normal depth; structure: E = EGL_out + K·Vo²/2g, K by deflection (0°0.15, 22.5°0.45, 45°0.75, 60°0.85, 90°1.0; start structure 0.5). Coefficients transcribed — verify against the HEC-22 edition in use.

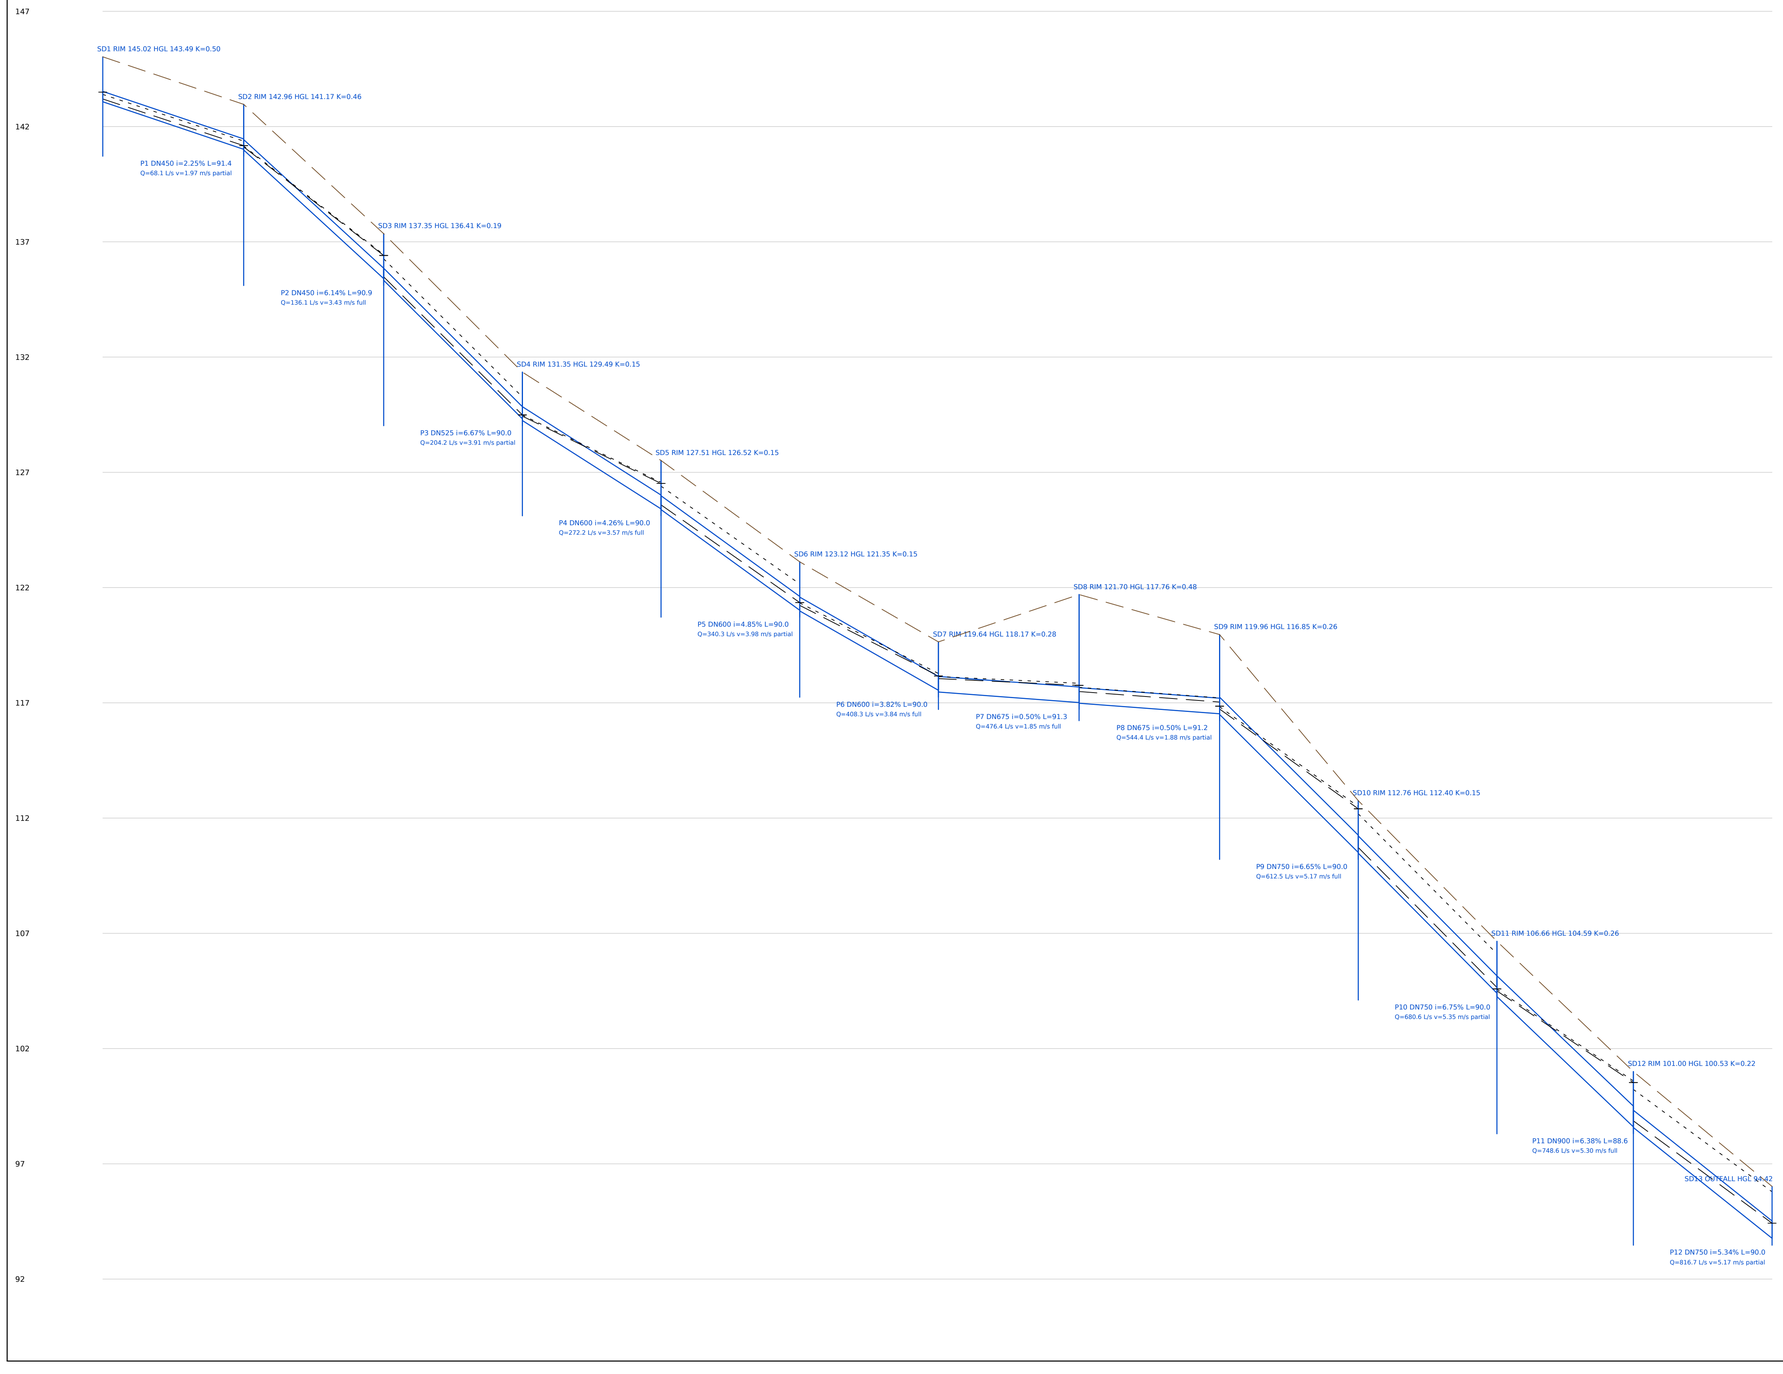

P-SURCH advisory pipe P2 Pipe flows full (surcharged): 0.554 vs max 0.000 m
P-SURCH advisory pipe P4 Pipe flows full (surcharged): 0.505 vs max 0.000 m
P-SURCH advisory pipe P6 Pipe flows full (surcharged): 0.023 vs max 0.000 m
P-SURCH advisory pipe P7 Pipe flows full (surcharged): 0.070 vs max 0.000 m
P-SURCH advisory pipe P9 Pipe flows full (surcharged): 1.146 vs max 0.000 m
P-SURCH advisory pipe P11 Pipe flows full (surcharged): 1.022 vs max 0.000 m

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Pipe profile Storm

DRAWING / SHEET No.
C-104

SHEET / REVISION / DATE OF ISSUE
Sheet 15 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 66392797209ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.

Scale AS SHOWN (not to scale)


NOTES / KEY PLAN

PROFESSIONAL ENGINEER SEAL

NO SEAL - PRELIMINARY

PIPE PROFILE - Sanitary H 1:1693 V 1:110

cyan = HGL, red = EGL, brown = rim; method FHWA HEC-22 approximate method: outfall HGL = max(tailwater, invert + (dc+D)/2); full flow: HGL_up = HGL_dn + Sf·L, Sf = (Qn/(A R^(2/3)))²; partial flow: normal depth; structure: E = EGL_out + K·Vo²/2g, K by deflection (0°0.15, 22.5°0.45, 45°0.75, 60°0.85, 90°1.0; start structure 0.5). Coefficients transcribed — verify against the HEC-22 edition in use.

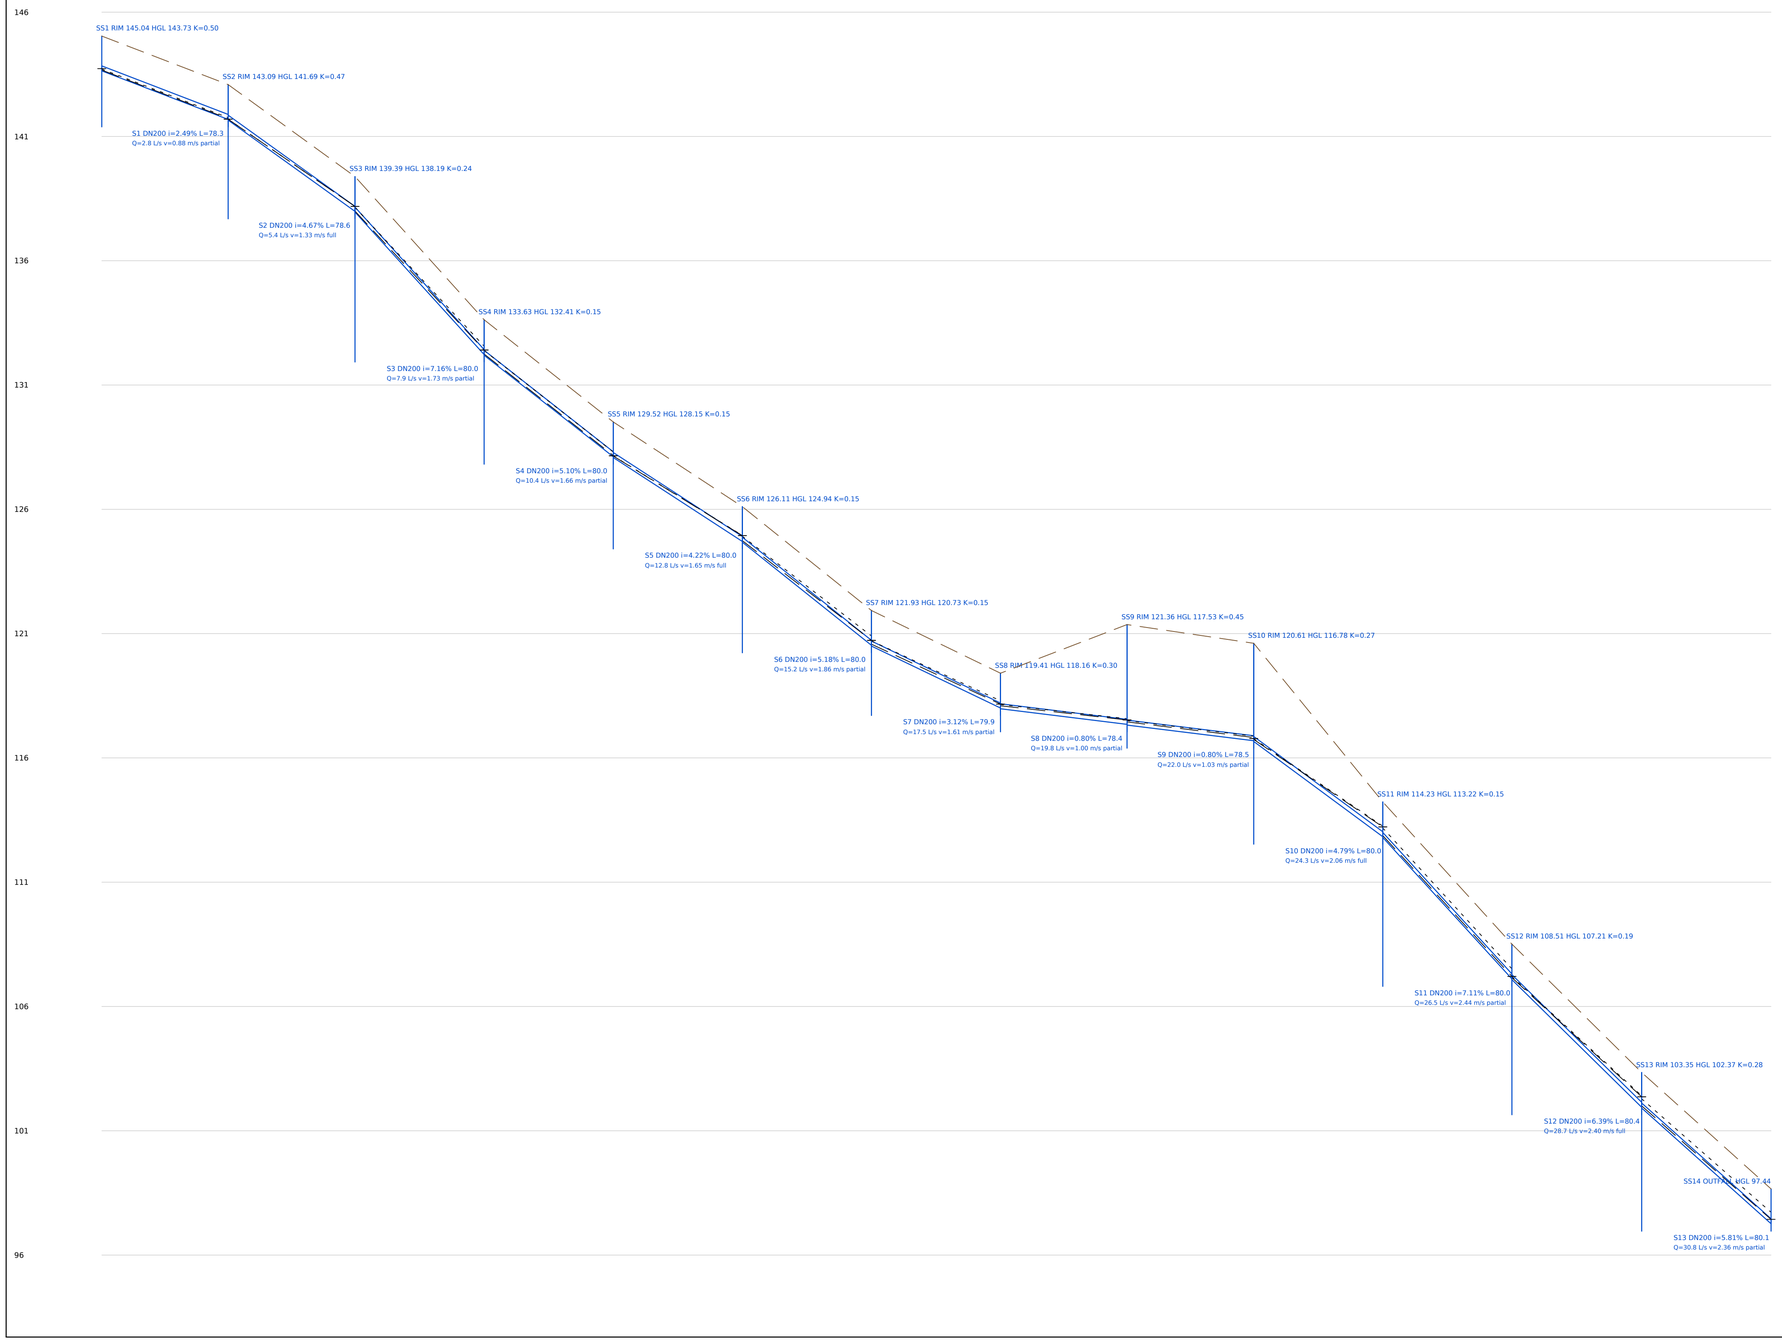

P-SURCH advisory pipe S2 Pipe flows full (surcharged): 0.001 vs max 0.000 m
P-SURCH advisory pipe S5 Pipe flows full (surcharged): 0.035 vs max 0.000 m
P-SURCH advisory pipe S10 Pipe flows full (surcharged): 0.195 vs max 0.000 m
P-SURCH advisory pipe S12 Pipe flows full (surcharged): 0.221 vs max 0.000 m

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Pipe profile Sanitary

DRAWING / SHEET No.
C-105

SHEET / REVISION / DATE OF ISSUE
Sheet 16 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 6639279720 9ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.


Scale AS SHOWN (not to scale)

NOTES / KEY PLAN

PROFESSIONAL ENGINEER SEAL


NO SEAL - PRELIMINARY

PIPE TRENCH (SCHEMATIC, 1:50)

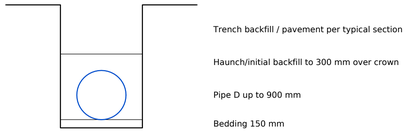


Trench width D + 600 mm = 1.50 m

MANHOLE (SCHEMATIC, 1:50)

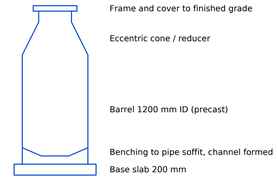

GRATE INLET (SCHEMATIC, 1:50)

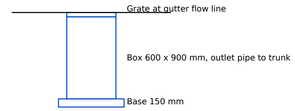

Network	Structure	Rim	Sump invert	Depth m	Inverts out (pipe, D mm)
Storm	SD1	145.024	143.074	1.95	P1 143.074 D450
Storm	SD2	142.963	140.983	1.98	P2 140.983 D450
Storm	SD3	137.352	135.327	2.03	P3 135.327 D525
Storm	SD4	131.346	129.246	2.10	P4 129.246 D600
Storm	SD5	127.512	125.382	2.13	P5 125.382 D600
Storm	SD6	123.116	120.986	2.13	P6 120.986 D600
Storm	SD7	119.643	117.468	2.17	P7 117.468 D675
Storm	SD8	121.698	116.981	4.72	P8 116.981 D675
Storm	SD9	119.961	116.495	3.47	P9 116.495 D750
Storm	SD10	112.756	110.476	2.28	P10 110.476 D750
Storm	SD11	106.655	104.255	2.40	P11 104.255 D900
Storm	SD12	101.004	98.574	2.43	P12 98.574 D750
Storm	SD13	96.020	93.770	2.25	
Sanitary	SS1	145.038	143.638	1.40	S1 143.638 D200
Sanitary	SS2	143.085	141.655	1.43	S2 141.655 D200
Sanitary	SS3	139.385	137.955	1.43	S3 137.955 D200
Sanitary	SS4	133.626	132.196	1.43	S4 132.196 D200
Sanitary	SS5	129.515	128.085	1.43	S5 128.085 D200
Sanitary	SS6	126.107	124.677	1.43	S6 124.677 D200
Sanitary	SS7	121.929	120.499	1.43	S7 120.499 D200
Sanitary	SS8	119.407	117.977	1.43	S8 117.977 D200
Sanitary	SS9	121.364	117.320	4.04	S9 117.320 D200
Sanitary	SS10	120.611	116.662	3.95	S10 116.662 D200
Sanitary	SS11	114.230	112.800	1.43	S11 112.800 D200
Sanitary	SS12	108.509	107.079	1.43	S12 107.079 D200
Sanitary	SS13	103.345	101.915	1.43	S13 101.915 D200
Sanitary	SS14	98.662	97.262	1.40	

Details are schematic. Final dimensions, materials, frames, grates, joint types and bedding class per the agency standard drawings and the governing specification cited on the standard-details sheet. Structure schedule lists every structure designed by the pipe-network tool (first 39 rows).

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Drainage details and structure schedule

DRAWING / SHEET No.
C-502

SHEET / REVISION / DATE OF ISSUE
Sheet 17 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 66392797209ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.


Scale 1:50 (details)

0 2 5 m

NOTES / KEY PLAN

PROFESSIONAL ENGINEER SEAL

NO SEAL - PRELIMINARY

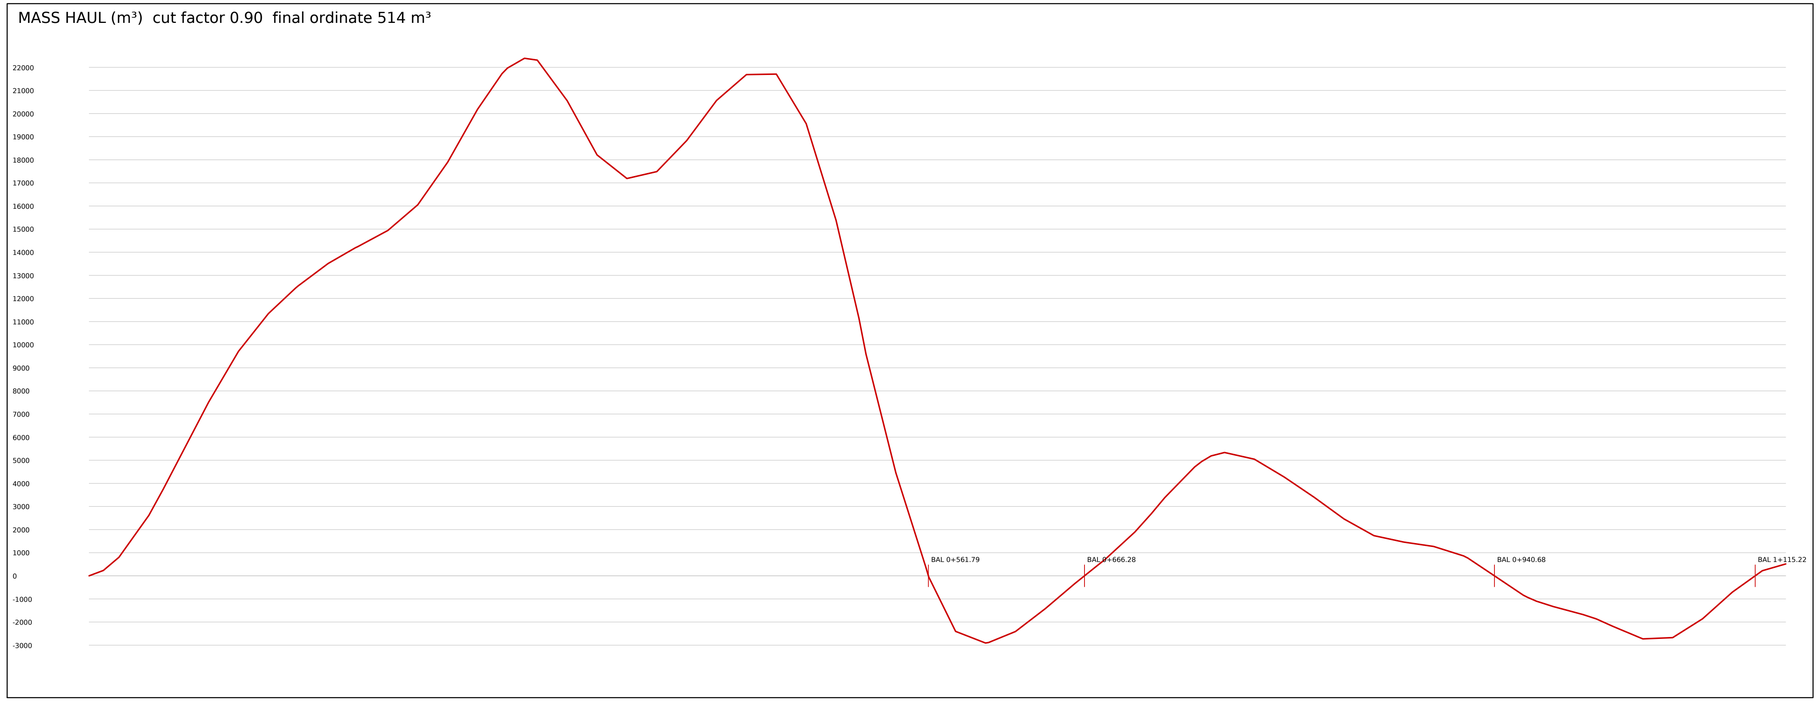

Station range	Cut m³	Fill m³	Asphalt concrete m³	Aggregate base m³	Aggregate subbase m³
0+000.00–0+100.00	10838	40	84.9	115.7	115.7
0+100.00–0+200.00	5811	0	84.4	115.2	115.2
0+200.00–0+300.00	8370	164	82.5	112.5	112.5
0+300.00–0+400.00	1936	5224	82.5	112.5	112.5
0+400.00–0+500.00	3533	6632	82.5	112.5	112.5
0+500.00–0+600.00	104	18378	83.0	113.2	113.2
0+600.00–0+700.00	5350	13	85.4	116.4	116.4
0+700.00–0+800.00	4022	1242	83.4	113.7	113.7
0+800.00–0+900.00	148	3135	82.5	112.5	112.5
0+900.00–1+000.00	0	2947	83.8	114.3	114.3
1+000.00–1+100.00	2480	1258	82.5	112.5	112.5
1+100.00–1+200.00	1386	30	29.4	40.1	40.1
Total	43976	39064	946.8	1291.1	1291.1

Pipe schedule

RCP DN450: 182.3 m
RCP DN525: 90.0 m
RCP DN600: 270.0 m
RCP DN675: 182.5 m
RCP DN750: 270.0 m
RCP DN900: 88.6 m
Structures: 13

Pipe schedule

PVC DN200: 1034.3 m
Structures: 14

Grading yard: cut 275 m³ fill 1006 m³ (grid 0.25 m)

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Mass haul and quantities

DRAWING / SHEET No.
C-602

SHEET / REVISION / DATE OF ISSUE
Sheet 18 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 66392797209ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.


Scale AS SHOWN (not to scale)

NOTES / KEY PLAN


PROFESSIONAL ENGINEER SEAL

NO SEAL - PRELIMINARY

Locality plan (UTM 1 km grid, OpenStreetMap basemap)

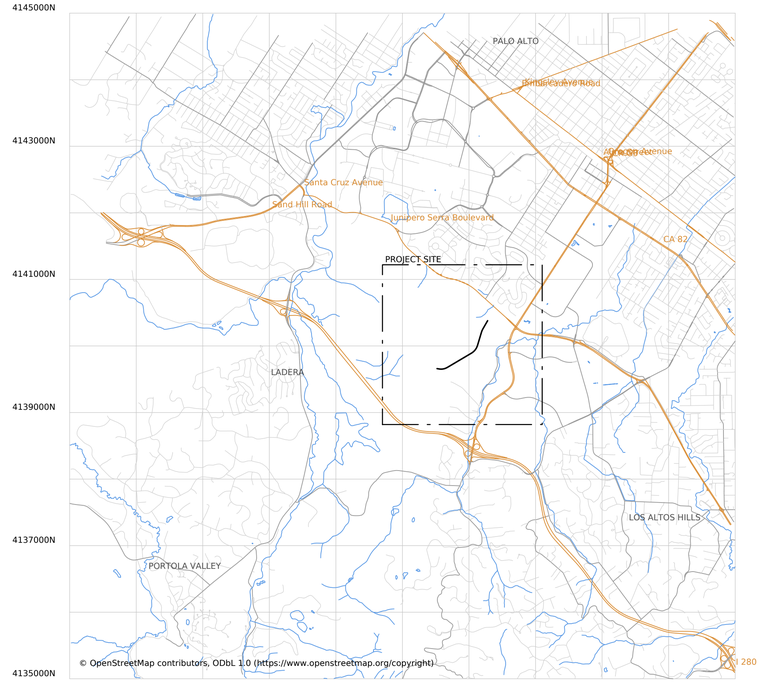

Project extent

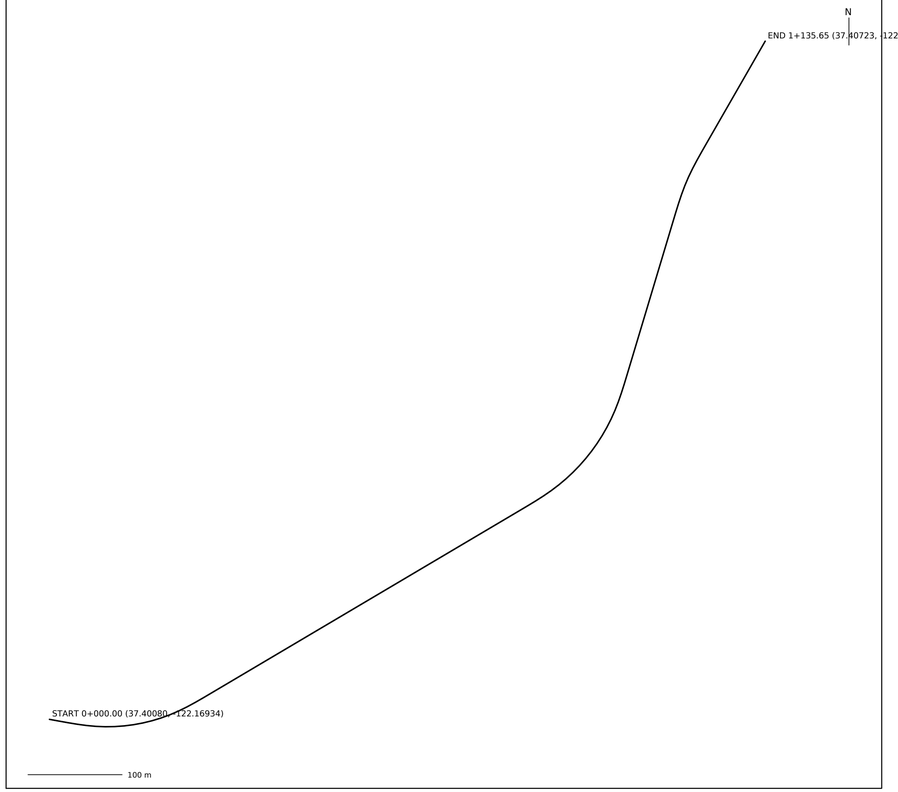

Point	Easting	Northing	Latitude	Longitude
Start	573520.000	4139660.000	37.400803	-122.169338
End	574280.000	4140380.000	37.407232	-122.160679

WGS84 / UTM zone 10N (transverse Mercator series, Snyder 1987, USGS PP 1395).
Basemap: © OpenStreetMap contributors, ODbL 1.0 (https://www.openstreetmap.org/copyright). Offline extract cached in the repository (data/basemap); refresh with scripts/fetch_osm_basemap.py. OSM is not survey-grade: for location only.

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Locality plan

DRAWING / SHEET No.
C-001

SHEET / REVISION / DATE OF ISSUE
Sheet 19 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 6639279720 9ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.

Scale as shown (not to scale)


N

NOTES / KEY PLAN

PROFESSIONAL ENGINEER SEAL

NO SEAL - PRELIMINARY

Intersection layout

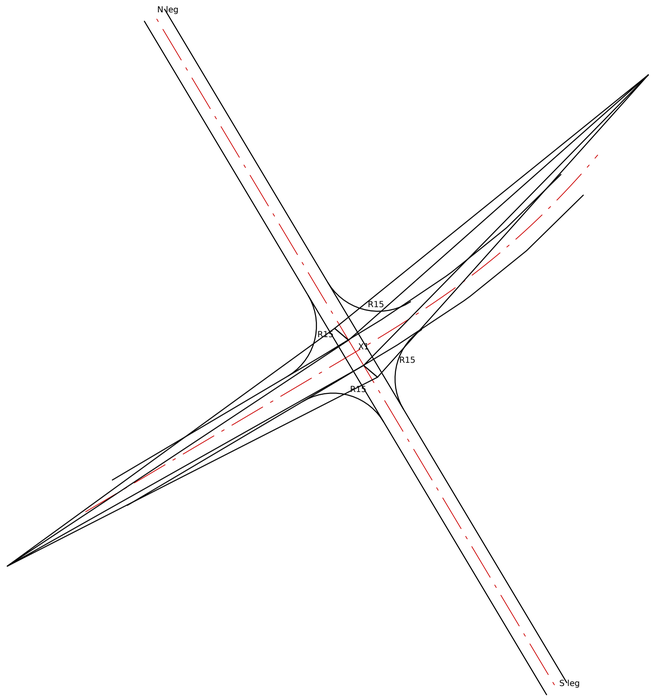

Intersection	Station	Required m	Avail. ahead m	Avail. back m
X1	0+570.00	104.3	153.0	468.0

ISD = 0.278*V*tg = 0.278*50*7.5. AASHTO Green Book 2018 §9.5.3 Case B1, time gap (AASHTO 2018 Table 9-6 passenger car left turn from stop (verify)). Available distance: vertical sight line along the major-road profile (eye 1.08 m, object 1.08 m), limited by the profile ends; horizontal obstructions in the sight triangle are cleared on site.

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Intersection layout and sight distance

DRAWING / SHEET No.
C-106

SHEET / REVISION / DATE OF ISSUE
Sheet 20 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 66392797209ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.

Scale as shown (not to scale)


N

NOTES / KEY PLAN

PROFESSIONAL ENGINEER SEAL

NO SEAL - PRELIMINARY

Drainage area map (D8 flow paths >= 0.5 ha, crossings)

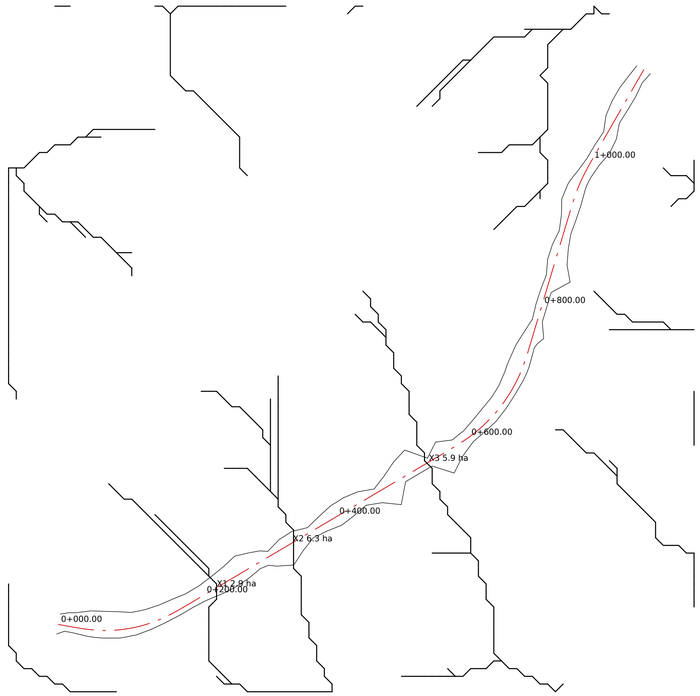

ID	Sta	A ha	L m	S	tc min	i mm/h	Q m3/s	Method
X1	0+215.00	2.86	336	0.0646	5.0	86.0	0.239	rational
X2	0+330.00	6.34	414	0.0887	5.1	85.0	0.524	rational
X3	0+535.00	5.94	451	0.0953	5.3	83.4	0.482	rational

Method: Rational method Q = C·i·A (FHWA HDS-2 / HEC-22 §3.2). IFD: 10-yr illustrative IDF (DEMO VALUES - not NOAA Atlas 14; engineer to enter the PFDS table for the site). Runoff coefficient / curve number and IFD are engineer inputs.
Catchments from priority-flood + D8 on the survey TIN; confirm by site inspection and mapping. Area outside the survey extent is not captured.

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Drainage area map and hydrology data

DRAWING / SHEET No.
C-701

SHEET / REVISION / DATE OF ISSUE
Sheet 21 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 6639279720 9ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.


Scale as shown (not to scale)

NOTES / KEY PLAN


PROFESSIONAL ENGINEER SEAL

NO SEAL - PRELIMINARY

Culvert layout

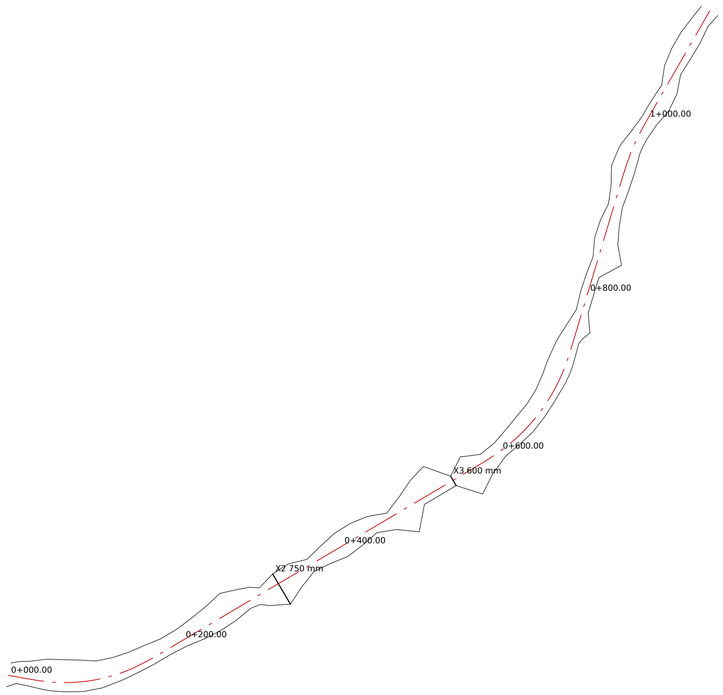

Longitudinal section, largest-flow culvert (V = H)

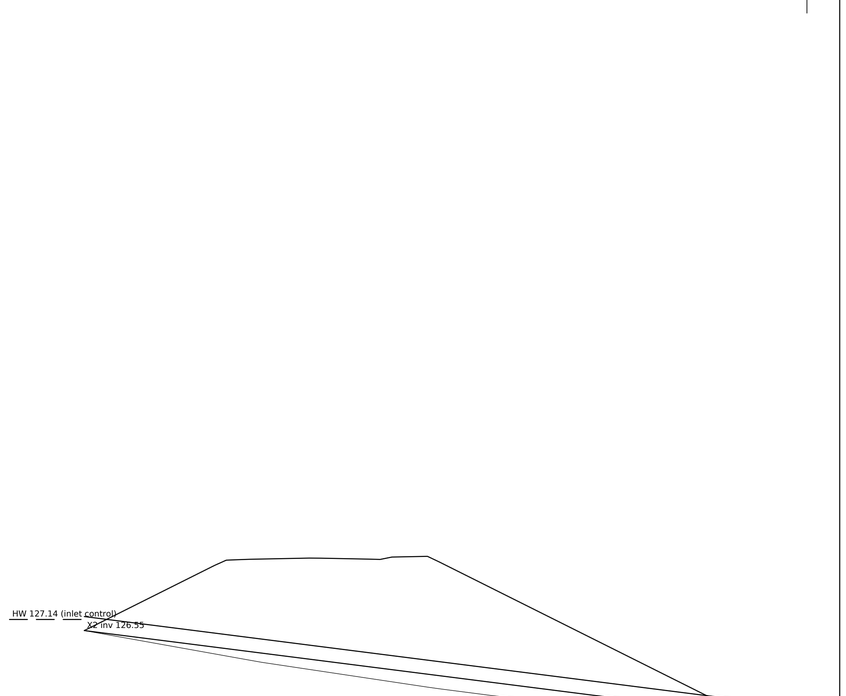

ID	Sta	Q m3/s	D m	L m	S %	Inv in	Inv out	HWi m	HWo m	HW/D	Ctrl	V out	Cover m
X1	0+215.00	0.239	-	-	-	-	-	-	-	-	in cut	-	-
X2	0+330.00	0.524	0.75	38.0	12.71	126.55	121.72	0.59	-4.07	0.79	inlet	6.59	4.17
X3	0+535.00	0.482	0.60	11.9	5.77	105.57	104.88	0.70	0.08	1.17	inlet	4.95	13.74

FHWA HDS-5 (3rd ed.): inlet control unsubmerged Form 1 for Q/(A D^0.5) <= 3.5 (Ku 1.811 SI), submerged for >= 4.0, linear between; outlet control full-flow energy with ho = max(TW, (dc+D)/2). Inlet ConcreteGrooveHeadwall, n 0.012, TW 0 m. Sizes, HW/D, freeboard and cover are engineer inputs (DEMO VALUE - engineer to replace).
Structural class (fill height, bedding, end treatment) per agency standard drawings; culverts above the agency structure threshold go to the bridge/structures hand-off.

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Culvert layout, section and schedule

DRAWING / SHEET No.
C-603

SHEET / REVISION / DATE OF ISSUE
Sheet 22 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 66392797209ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.

Scale as shown (not to scale)


N

NOTES / KEY PLAN


PROFESSIONAL ENGINEER SEAL

NO SEAL - PRELIMINARY

cut 0+711.01 L: FS 1.41 Bishop / 1.38 Spencer

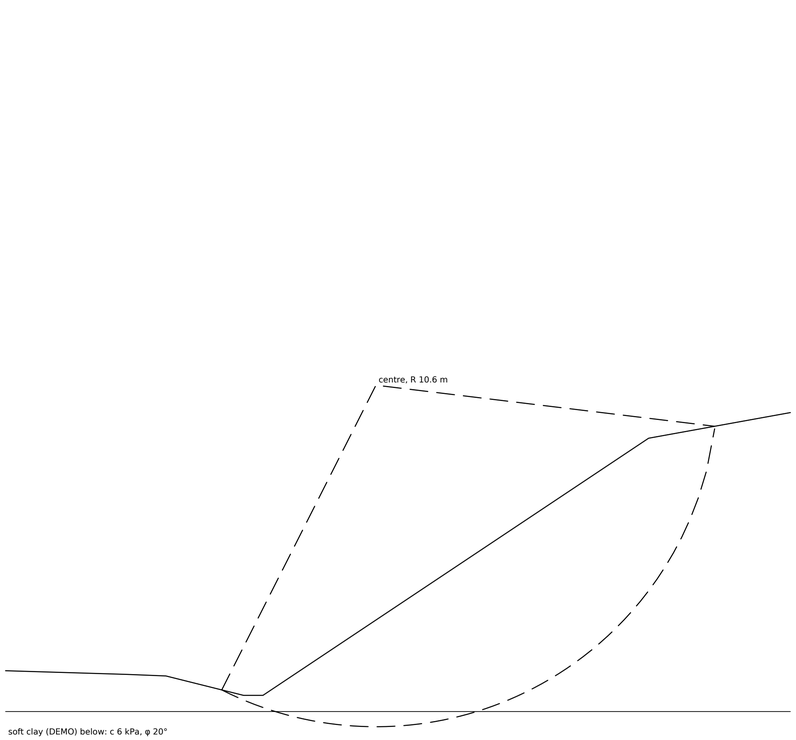

cut 0+100.00 L: FS 1.40 Bishop / 1.38 Spencer

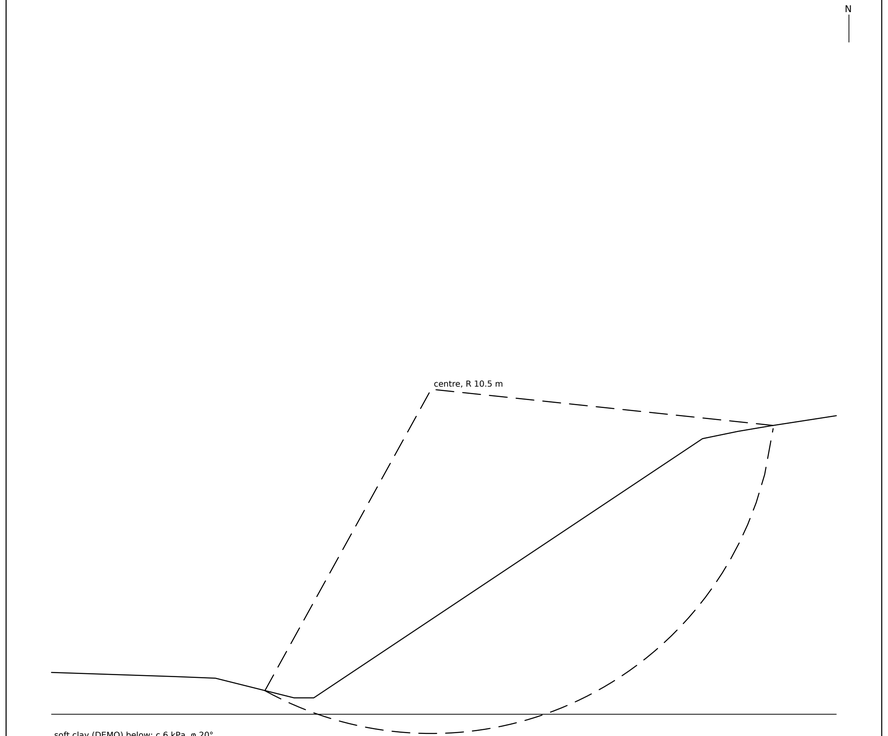

Sta	Side	Type	H m	FS Bishop	FS Spencer	theta deg	FS min	Xc	Zc	R
0+711.01	L	cut	8.0	1.405	1.383	20.5	1.30	11.5	130.9	10.6
0+100.00	L	cut	7.9	1.405	1.383	19.8	1.30	11.6	151.8	10.5
0+020.00	L	cut	7.5	1.425	1.403	19.4	1.30	11.5	153.7	10.4
0+560.00	L	fill	6.6	1.634	1.616	15.7	1.30	8.9	124.1	12.7
0+940.00	L	fill	5.2	1.695	1.677	13.6	1.30	7.1	109.8	11.3
0+860.00	R	fill	5.0	1.603	1.583	15.4	1.30	6.1	115.1	11.1

Soil c' 8 kPa, phi' 30 deg, gamma 19 kN/m3, ru 0.1 from GEOTECH REPORT PLACEHOLDER (no site investigation in the demo) (DEMO VALUE - engineer to replace). Homogeneous soil, circular surfaces, pore pressure by ru; Bishop simplified and Spencer (constant interslice inclination). Layering, water tables, seismic and reinforcement need the geotechnical designer's analysis using slope-sections.csv. Criterion FS >= 1.3 (engineer / agency).

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Slope stability - critical slip circles

DRAWING / SHEET No.
C-702

SHEET / REVISION / DATE OF ISSUE
Sheet 23 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 6639279720 9ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.

Scale as shown (not to scale)

NOTES / KEY PLAN

PROFESSIONAL ENGINEER SEAL

NO SEAL - PRELIMINARY

Edge drain detail (schematic, NTS)



Item	Value
qi (Cedergren)	0.2734 m3/day/m2
inflow per m	0.4785 m3/day/m
layer capacity	2.4739 m3/day/m
resultant slope / path	0.0825 / 7.22 m
t50	0.75 h
edge drain capacity	0.0158 m3/s
outlet spacing	150 m
AASHTO m (engineer)	1

qi = Ic(Nc/W + Wc/(W·Cs)) + kp = 0.223(2/1.75 + 1.75/(1.75·12.0)) + 0.0000 = 0.2734 m³/day/m²
inflow per m = qi·W = 0.4785 m³/day/m; layer capacity k·S_R·H = 2.4739 m³/day/m
resultant slope S_R = 0.0825, flow path L_R = 7.22 m, t50 = ne·L_R²/(2k(H+L_R·S_R)) = 0.75 h (approximation)
edge drain D100 mm full capacity 0.01583 m³/s; outlet spacing = min(Qp/inflow, max) = 150 m

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Subsurface (pavement) drainage

DRAWING / SHEET No.
C-503

SHEET / REVISION / DATE OF ISSUE
Sheet 24 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 6639279720 9ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.


Scale as shown (not to scale)

NOTES / KEY PLAN


PROFESSIONAL ENGINEER SEAL

NO SEAL - PRELIMINARY

Wall types (plan)

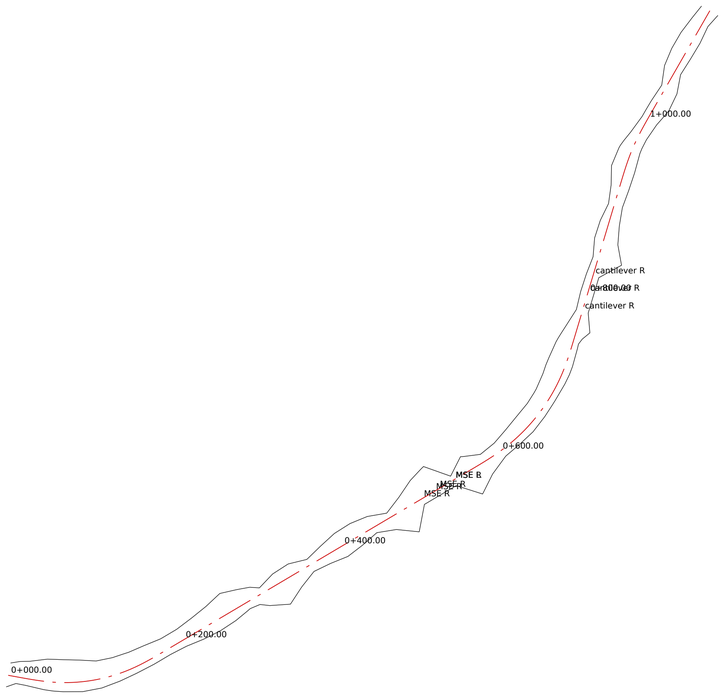

Typical MSE section, 0+520.00 R (H 16.3 m)

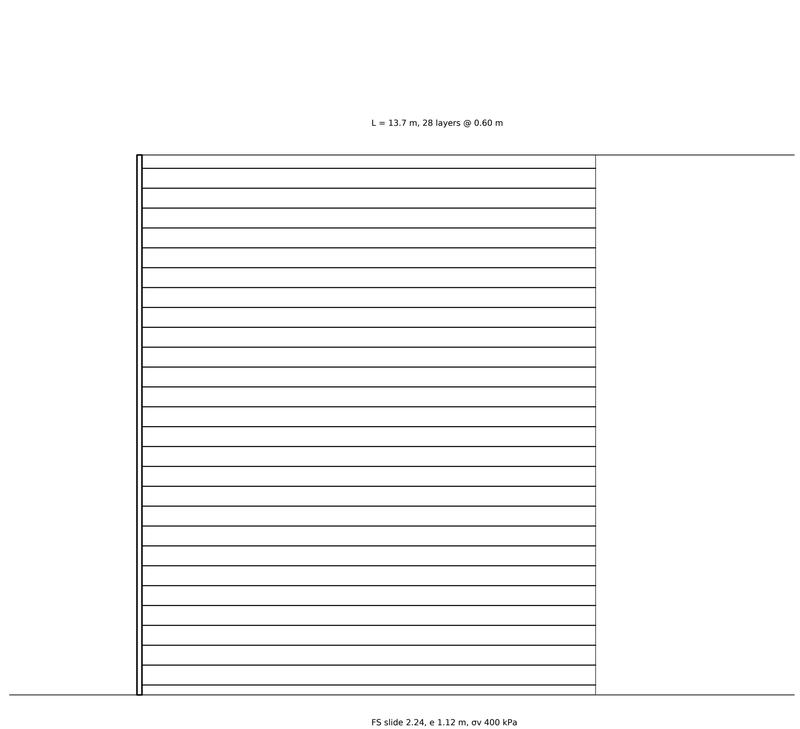

Sta	Side	Cut	H m	Selected	MSE L m	FS slide	e m	σv kPa	Tmax kN/m	Nail L m
0+500.00	R	fill	13.81	MSE	9.7	1.85	1.16	372	47.5	11.1
0+515.33	R	fill	16.00	MSE	12.9	2.15	1.15	399	55.0	12.8
0+520.00	R	fill	16.30	MSE	13.7	2.24	1.12	400	56.0	13.0
0+540.00	L	fill	15.23	MSE	11.1	1.94	1.22	400	52.4	12.2
0+540.00	R	fill	16.13	MSE	13.2	2.18	1.14	400	55.4	12.9
0+780.00	R	fill	5.34	cantilever	3.8	1.69	0.51	155	18.8	4.3
0+800.00	R	fill	6.65	cantilever	4.7	1.73	0.61	189	23.2	5.3
0+820.00	R	fill	6.11	cantilever	4.3	1.71	0.58	176	21.4	4.9

Selection rule: gravity ≤ 3.0 m, cantilever ≤ 8.0 m (engineer practical ranges), profile reshape if the change ≤ 1.0 m, otherwise MSE (fill) or soil nail (cut).
Reference: FHWA-NHI-10-024 (GEC 11) MSE walls; FHWA-NHI-14-007 (GEC 7) soil nail walls; FHWA-NHI-07-071 Earth Retaining Structures (type selection).
MSE external stability by allowable stress (GEC 11): sliding, eccentricity e ≤ L/6, bearing with Meyerhof distribution; internal Tmax = Ka,r·σv·Sv. Global stability, compound failure, seismic and supplier design are by the geotechnical/structures specialist.

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Retaining wall type selection

DRAWING / SHEET No.
C-703

SHEET / REVISION / DATE OF ISSUE
Sheet 25 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 6639279720 9ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.


Scale as shown (not to scale)

NOTES / KEY PLAN

PROFESSIONAL ENGINEER SEAL

NO SEAL - PRELIMINARY

Stem reinforcement, governing wall 0+800.00 R (schematic)

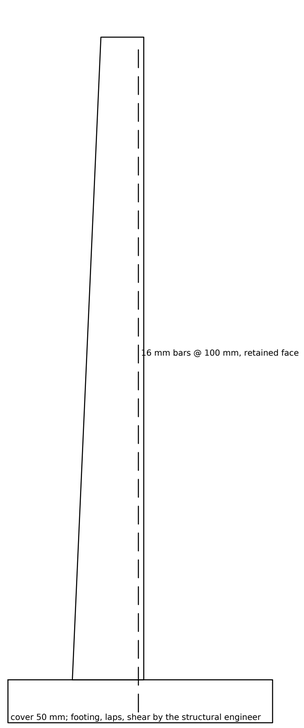

Sta	Side	Stem H m	t m	Mu kNm/m	d m	As req	As min	As mm2/m	Bar mm	Spacing mm	OK
0+780.00	R	4.81	0.53	233.6	0.476	1331	961	1331	16	150	yes
0+800.00	R	5.99	0.67	429.1	0.607	1924	1197	1924	16	100	yes

f'c 28 MPa, fy 420 MPa, phi 0.9, load factor 1.5 on the active thrust (phi' 30 deg, gamma 19 kN/m3, surcharge 10 kPa), min steel ratio 0.0018 - engineer inputs (DEMO VALUE - engineer to replace). Shear, crack width, footing design and detailing remain with the structural engineer.

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Retaining wall stem reinforcement

DRAWING / SHEET No.
C-704

SHEET / REVISION / DATE OF ISSUE
Sheet 26 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 66392797209ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.


Scale as shown (not to scale)

NOTES / KEY PLAN

PROFESSIONAL ENGINEER SEAL

NO SEAL - PRELIMINARY

Signing and pavement marking (concept)

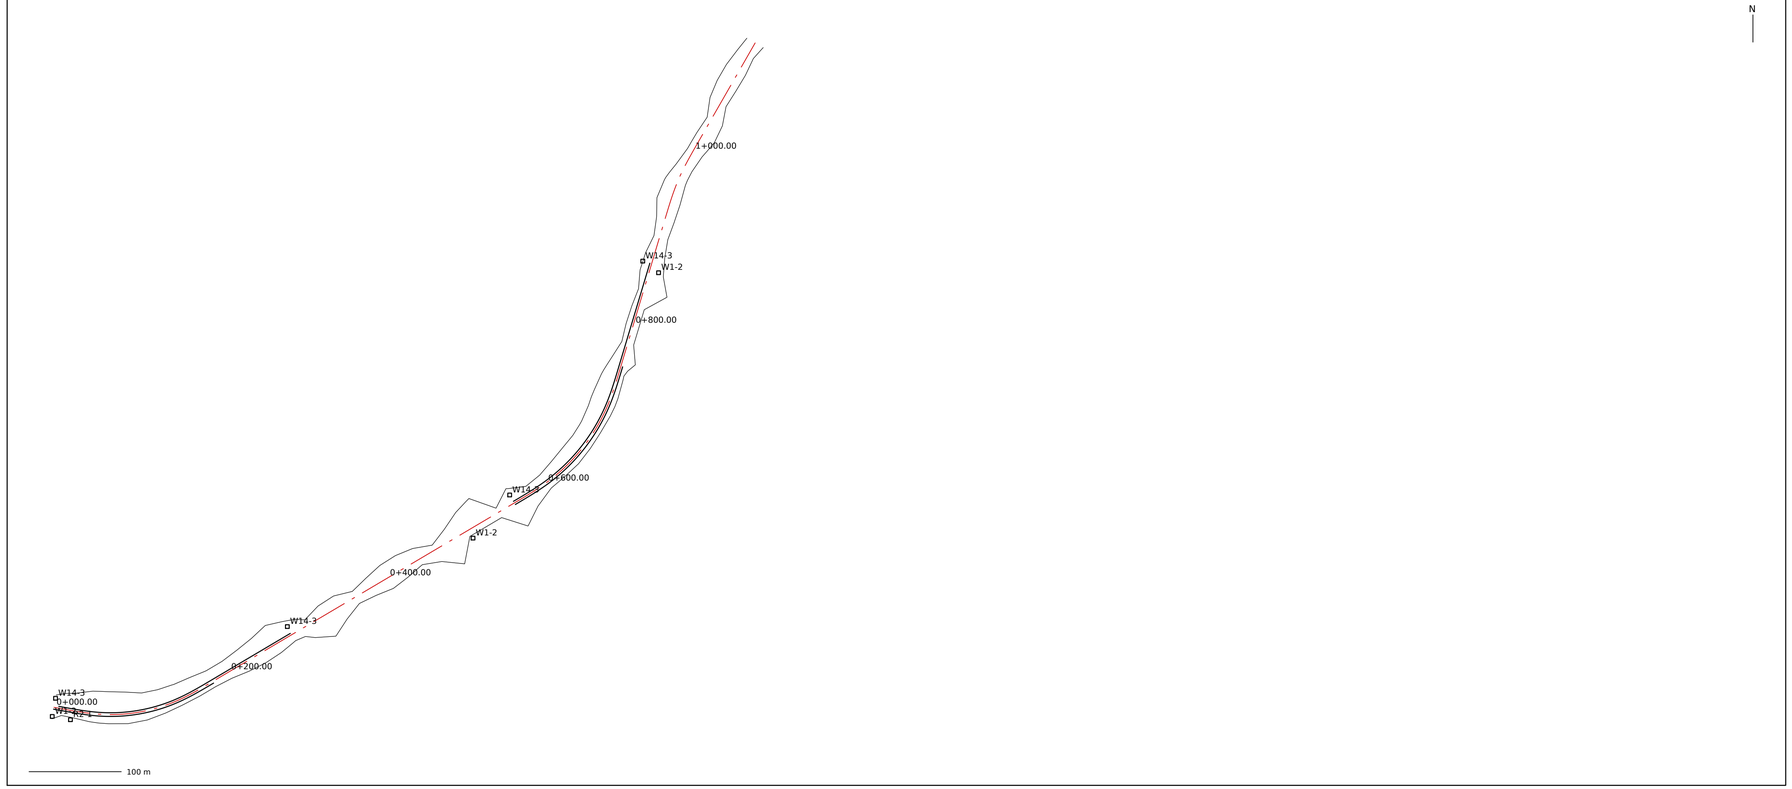

Code	Sign	Station	Side	Reason
W1-2	Curve warning (with advisory speed if ≤ 50 km/h)	0+000.00	right	curve 1 R 180 m < 300 m (engineer threshold)
W1-2	Curve warning (with advisory speed if ≤ 50 km/h)	0+502.02	right	curve 2 R 200 m < 300 m (engineer threshold)
W1-2	Curve warning (with advisory speed if ≤ 50 km/h)	0+862.83	right	curve 3 R 200 m < 300 m (engineer threshold)
R2-1	Speed limit	0+020.00	right	start of project, 50 km/h design speed (posted limit set by the road aut~
W14-3	No passing zone pennant	0+000.00	left	start of no-passing zone (up-station)
W14-3	No passing zone pennant	0+560.00	left	start of no-passing zone (up-station)
W14-3	No passing zone pennant	0+870.00	left	start of no-passing zone (down-station)
W14-3	No passing zone pennant	0+280.00	left	start of no-passing zone (down-station)

No-passing from	to	Direction
0+000.00	0+180.00	up-station
0+560.00	0+755.00	up-station
0+560.00	0+870.00	down-station
0+005.00	0+280.00	down-station

Manual: FHWA MUTCD 11th Edition (2023). PSD 168 m (MUTCD Table 3B-1 (2009 ed.; verify numbering in the 11th ed.), ft→m). Centre line yellow, edge line white.
Manual: FHWA MUTCD 11th Edition (2023)
No-passing zones in both directions from vertical sight distance on the design profile (eye = object height, per the manual) and, where lateral_clear_m is given, from the horizontal sight-line offset M = R(1 - cos(PSD/2R)) on curves. Intersection signing is added by the engineer.
Sign codes are the usual designations in each manual and must be confirmed against the current edition.

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Signing and pavement marking (concept)

DRAWING / SHEET No.
C-504

SHEET / REVISION / DATE OF ISSUE
Sheet 27 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 6639279720 9ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.


Scale as shown (not to scale)

NOTES / KEY PLAN

PROFESSIONAL ENGINEER SEAL

NO SEAL - PRELIMINARY

Lighting layout (concept)

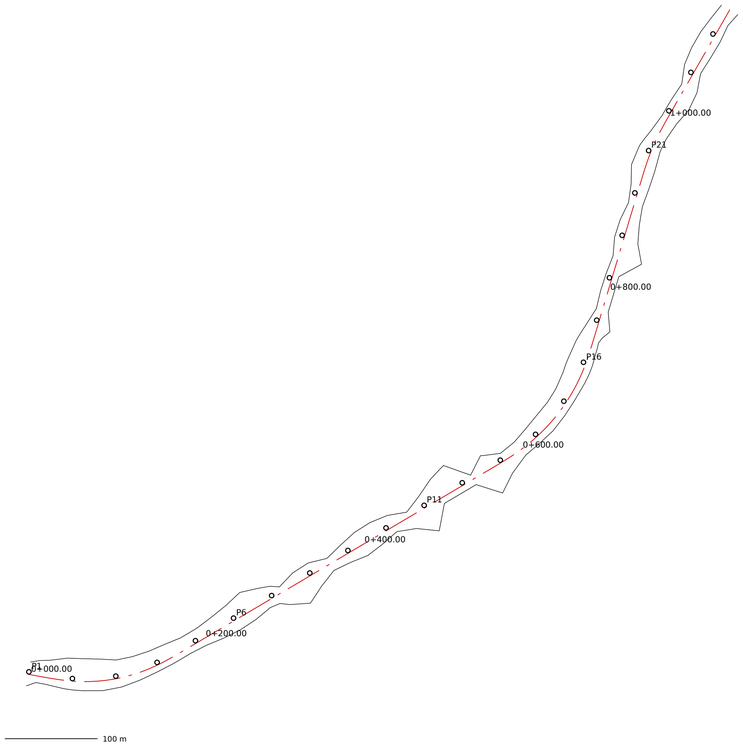

Pole	Station	E	N	Side
P1	0+000.00	573520.49	4139662.71	left
P2	0+048.00	573567.63	4139655.43	left
P3	0+096.00	573614.69	4139658.03	left
P4	0+144.00	573659.40	4139672.94	left
P5	0+192.00	573700.96	4139696.47	left
P6	0+240.00	573742.27	4139720.91	left
P7	0+288.00	573783.58	4139745.36	left
P8	0+336.00	573824.89	4139769.81	left
P9	0+384.00	573866.19	4139794.25	left
P10	0+432.00	573907.50	4139818.70	left
P11	0+480.00	573948.81	4139843.15	left
P12	0+528.00	573990.12	4139867.60	left
P13	0+576.00	574031.37	4139892.08	left
P14	0+624.00	574069.59	4139920.05	left
P15	0+672.00	574100.25	4139955.98	left
P16	0+720.00	574121.51	4139998.16	left
P17	0+768.00	574135.84	4140043.79	left
P18	0+816.00	574149.64	4140089.77	left
P19	0+864.00	574163.43	4140135.74	left
P20	0+912.00	574177.22	4140181.72	left
…	24 poles in light			

S = Φ·CU·LLF/(E·W) = 20000·0.45·0.8/(9·3.50) = 228.6 m; limit 4·H = 48.0 m; used 48.0 m
Concept layout by the lumen method. Photometric design (luminance, uniformity, glare) to IES RP-8 / TAC Guide for the Design of Roadway Lighting / BS 5489-1 + BS EN 13201 / AS/NZS 1158 is by the lighting designer.

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Road lighting layout (concept)

DRAWING / SHEET No.
C-107

SHEET / REVISION / DATE OF ISSUE
Sheet 28 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 6639279720 9ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.

Scale as shown (not to scale)


N

NOTES / KEY PLAN

PROFESSIONAL ENGINEER SEAL

NO SEAL - PRELIMINARY

Utilities and conflicts

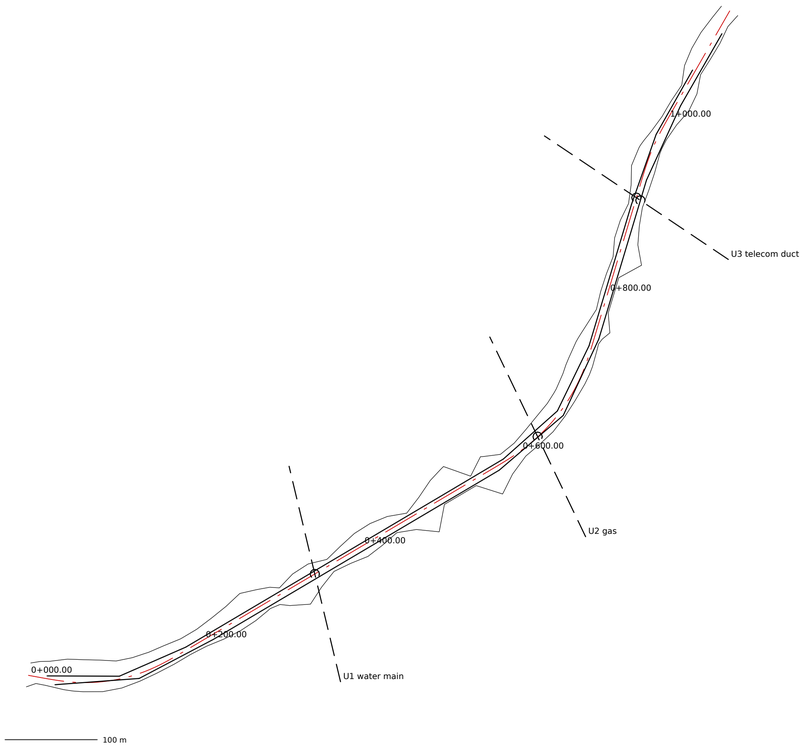

Utility	Kind	Owner	Station	Issue	Value m	Action	QL
U1	water main	DEMO UTILITY OWN~	0+940.00	fill increases cover beyond utility limit	5.92	owner to confirm loading / provide access	QL-D (synthetic d~
U2	gas	DEMO UTILITY OWN~	0+420.33	cut/subgrade within clearance of utility	-1.83	pothole (QL-A), then lower/relocate or protect	QL-D (synthetic d~
U3	telecom duct	DEMO UTILITY OWN~	0+790.00	crossing - no vertical conflict found	2.30	protect in place; confirm location	QL-D (synthetic d~
U3	telecom duct	DEMO UTILITY OWN~	0+810.00	crosses Storm pipe P10 with clearance below minimum	-0.10	adjust pipe grade or relocate utility	QL-D (synthetic d~

Utility records are owner / engineer supplied at the stated quality level (DEMO VALUE - engineer to replace). Clearance 0.3 m and maximum added cover 3 m are engineer inputs. Conflicts at QL-C/D need potholing (QL-A) before design is finalised.

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Utility plan and conflict register

DRAWING / SHEET No.
C-604

SHEET / REVISION / DATE OF ISSUE
Sheet 29 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 66392797209ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.

Scale as shown (not to scale)


N

NOTES / KEY PLAN

PROFESSIONAL ENGINEER SEAL

NO SEAL - PRELIMINARY

Land requirement plan

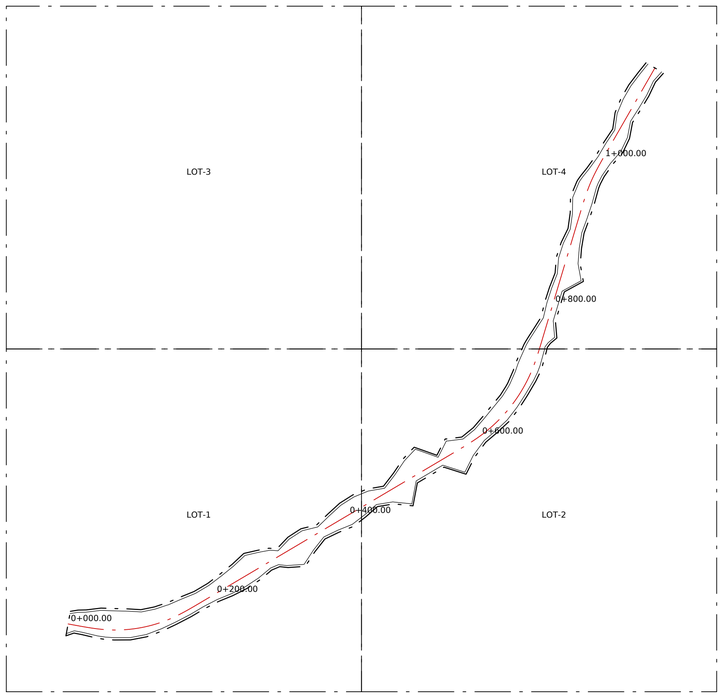

Parcel	Owner	Parcel m2	Take m2	Take %
LOT-1	DEMO PARCEL	204191	13849	6.8
LOT-2	DEMO PARCEL	204191	10213	5.0
LOT-3	DEMO PARCEL	204191	0	0.0
LOT-4	DEMO PARCEL	204191	10755	5.3

Land requirement = daylight lines + 3 m working / maintenance buffer (engineer). Area 34815 m2. Parcel boundaries from surveyor / cadastre data (DEMO VALUE - engineer to replace); legal descriptions and title by the land surveyor.

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Right-of-way / land requirement plan

DRAWING / SHEET No.
C-108

SHEET / REVISION / DATE OF ISSUE
Sheet 30 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 6639279720 9ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.

Scale as shown (not to scale)


N

NOTES / KEY PLAN

PROFESSIONAL ENGINEER SEAL

NO SEAL - PRELIMINARY

Erosion and sediment control (concept)

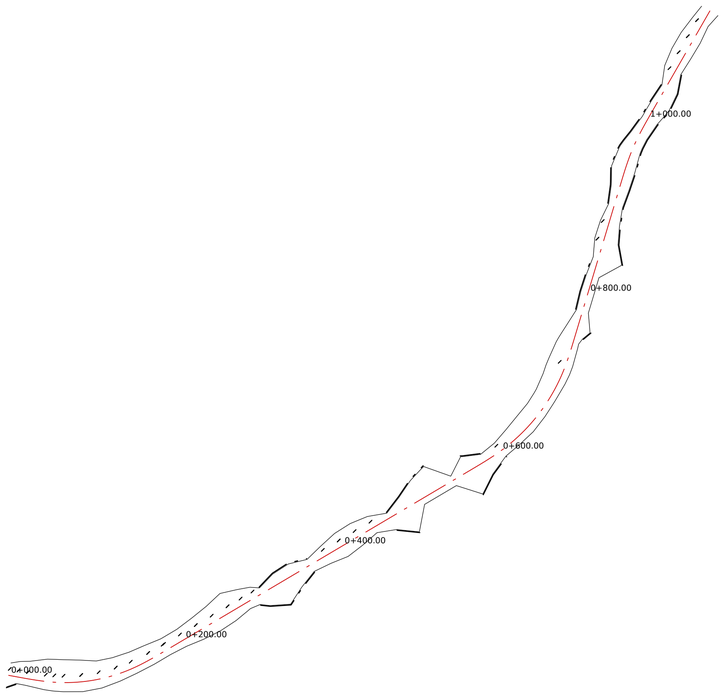

Item	Location	Quantity	Basis
Sediment fence	L 0+300.00 - 0+360.00	62 m	fill toe + offset
Sediment fence	L 0+460.00 - 0+520.00	64 m	fill toe + offset
Sediment fence	L 0+560.00 - 0+580.00	22 m	fill toe + offset
Sediment fence	L 0+780.00 - 0+840.00	60 m	fill toe + offset
Sediment fence	L 0+900.00 - 1+040.00	145 m	fill toe + offset
Sediment fence	R 0+000.00 - 0+009.58	11 m	fill toe + offset
Sediment fence	R 0+291.41 - 0+360.00	77 m	fill toe + offset
Sediment fence	R 0+460.00 - 0+480.00	25 m	fill toe + offset
Sediment fence	R 0+560.00 - 0+602.02	49 m	fill toe + offset
Sediment fence	R 0+751.01 - 0+760.00	11 m	fill toe + offset
Sediment fence	R 0+840.00 - 1+060.00	222 m	fill toe + offset
Check dams	L ditch 0+000.00 - 0+291.41	24 @ 13 m	L = h/S = 0.6/0.0478
Check dams	L ditch 0+380.00 - 0+440.00	5 @ 13 m	L = h/S = 0.6/0.0450
Check dams	L ditch 0+600.00 - 0+760.00	2 @ 120 m	L = h/S = 0.6/0.0050
Check dams	L ditch 0+860.00 - 0+880.00	3 @ 9 m	L = h/S = 0.6/0.0659
Check dams	L ditch 1+060.00 - 1+135.65	7 @ 11 m	L = h/S = 0.6/0.0554
Culvert inlet / outlet protection	2 culverts	4 each	both ends
Stabilised construction entrance	start and end tie-ins	2 each	site access

Concept ESC plan: sediment fence at fill toes + 1 m, check dams at L = h/S (h = 0.6 m), protection at culvert ends, stabilised entrances. Devices, spacing and inspection regime per the agency ESC manual and permit (DEMO VALUE - engineer to replace); the SWPPP / ESC plan is completed by the qualified ESC designer.

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Erosion and sediment control plan (concept)

DRAWING / SHEET No.
C-109

SHEET / REVISION / DATE OF ISSUE
Sheet 31 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 66392797209ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.

Scale as shown (not to scale)


N

NOTES / KEY PLAN

PROFESSIONAL ENGINEER SEAL

NO SEAL - PRELIMINARY

Landscape concept (plan)

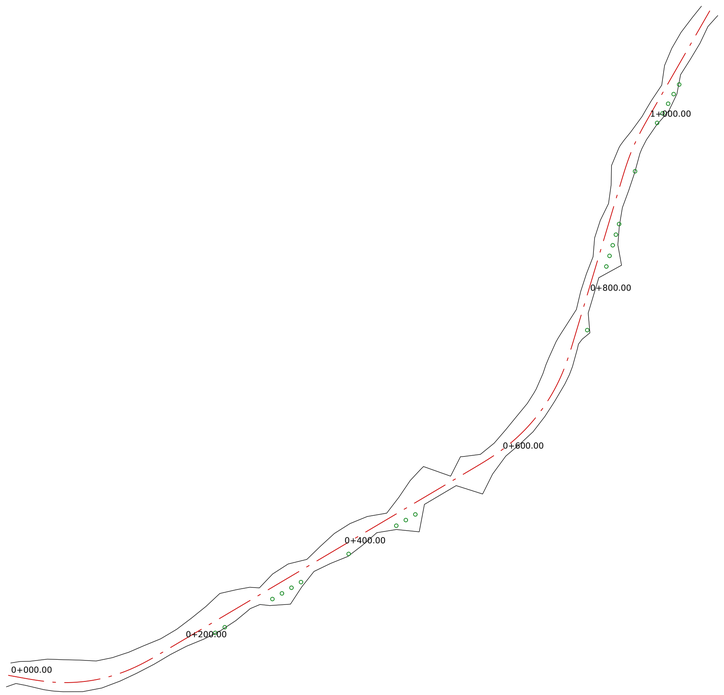

Item	Unit	Quantity
seed + 100 mm topsoil (flatter than 4H:1V)	m²	0
native shrubs/grasses + erosion control blanket (4H:1V to 2H:1V)	m²	607
hydroseed + turf reinforcement mat (steeper than 2H:1V)	m²	11570
Topsoil	m³	0
Shrubs	each	607
Street trees	each	22

Trees every 12 m at 11.0 m from the centreline on the right side; omitted: 0 clear zone, 7 near intersections (±40 m), 0 near lighting poles (±3 m), 66 at walls or within the earthwork footprint.
Slope classes by side-slope steepness; species, soil testing, irrigation and establishment period by the landscape architect (agency planting guide).

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Landscape concept

DRAWING / SHEET No.
C-110

SHEET / REVISION / DATE OF ISSUE
Sheet 32 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 6639279720 9ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.


Scale as shown (not to scale)

NOTES / KEY PLAN

PROFESSIONAL ENGINEER SEAL

NO SEAL - PRELIMINARY

Staging diagram (station vs stage)

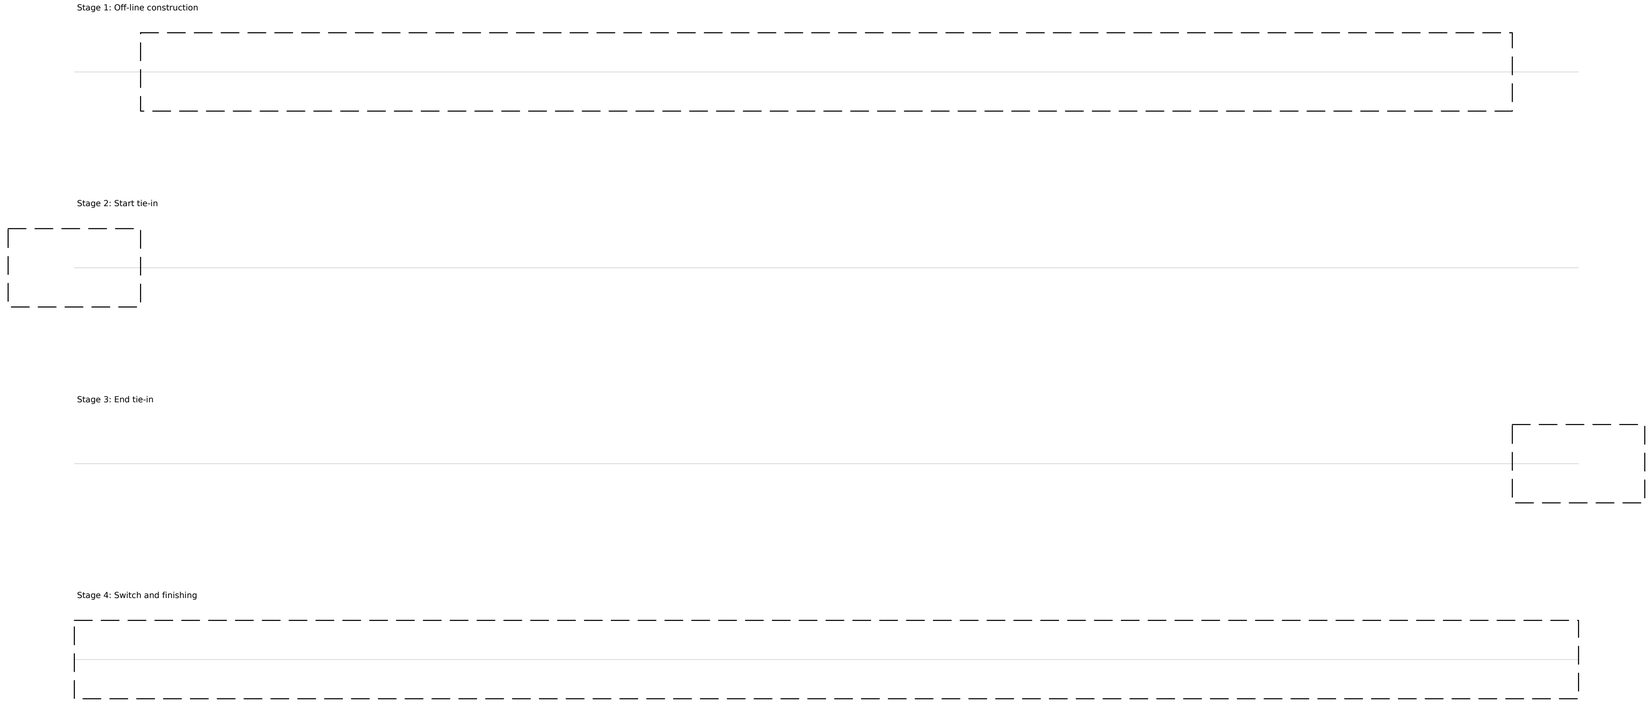

horizontal: station; bars: work zone extent

Stage	Name	From	To	Traffic	Works	Taper m	Devices
1	Off-line construction	0+050.00	1+085.65	existing network unaffected; site access	earthworks, drainage, culverts, pavemen~	–	site access signs; construction entrance; fencing
2	Start tie-in	-1+950.00	0+050.00	single-lane alternating flow on the exis~	tie-in pavement, kerb, drainage connec~	161	advance warning series; flagger or portable signals; channelising devices on th~
3	End tie-in	1+085.65	1+185.65	single-lane alternating flow on the exis~	tie-in at the end	161	advance warning series; flagger or portable signals; channelising devices
4	Switch and finishing	0+000.00	1+135.65	traffic on the new alignment; shoulder ~	line-marking, signs, barrier, lighting, s~	54	shoulder taper (L/3); works vehicle with arrow board

MUTCD §6C.08 / Table 6C-4 (2009 ed.; verify numbering in the 11th ed.) taper L = WS²/60 (≤ 40 mph) or WS (≥ 45 mph)
Concept staging only. Detailed TTM / TMP layouts, device spacing and approvals per the agency manual by a qualified TTM designer.

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Temporary traffic management staging (concept)

DRAWING / SHEET No.
C-705

SHEET / REVISION / DATE OF ISSUE
Sheet 33 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved


PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 66392797209ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.


Scale as shown (not to scale)

NOTES / KEY PLAN

PROFESSIONAL ENGINEER SEAL

NO SEAL - PRELIMINARY

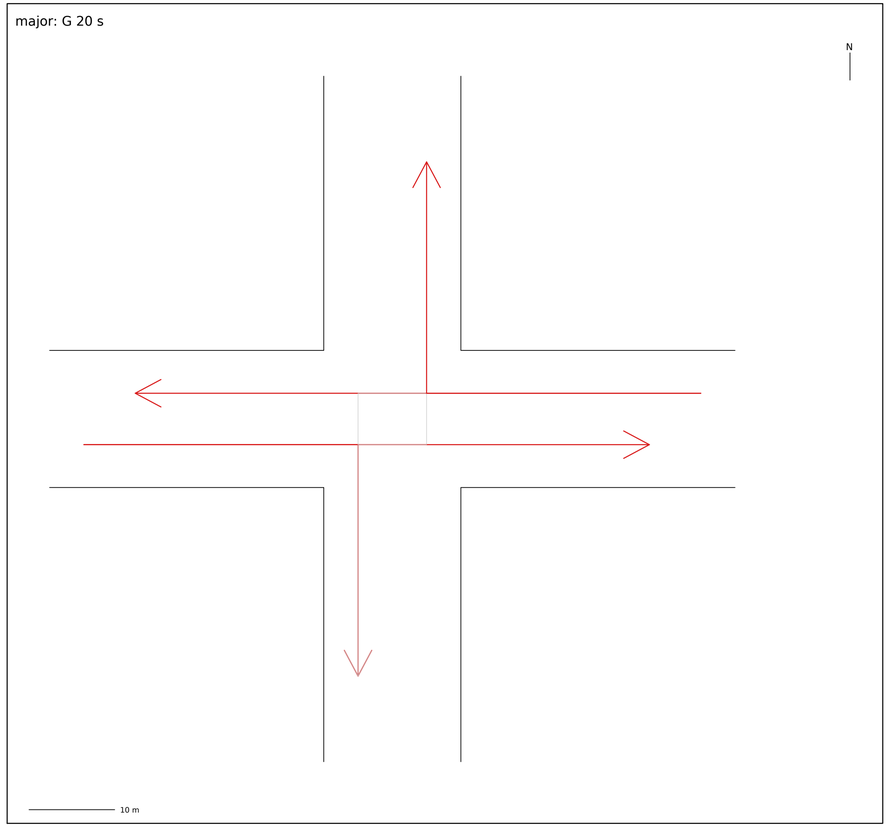

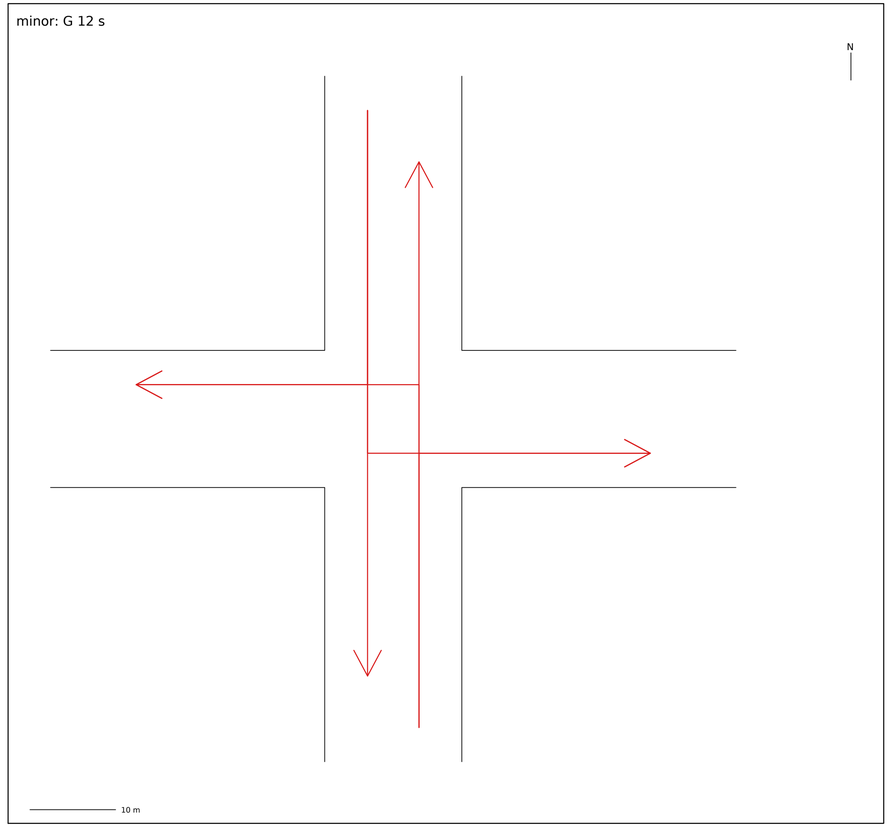

Phase	Movements	y	Green s	Yellow s	All-red s	X	Delay s	LOS
major	EB T/R/L perm., WB T/R/L perm.	0.244	20.4	3.3	1.3	0.48	7.4	A
minor	NB all, SB all	0.139	11.6	2.4	2.4	0.48	14.1	B

Warrant item	Value
Method	MUTCD Warrant 1 (Table 4C-1), 100 % volumes
Thresholds A (major/minor)	500 / 150 veh/h
Thresholds B (major/minor)	750 / 75 veh/h
Hours A / B / combination	8 / 0 / 6
Warrant met	yes

Cycle: Webster C0 = 27.6 s, used 40 s; lost time 8 s; ΣY 0.383; intersection delay 9.4 s/veh, LOS A (HCM signalized thresholds).
Saturation flow 1800 pcu/h/lane and volumes are engineer inputs (DEMO VALUE - engineer to replace). Dashed (grey) arrows: permissive lefts.
Reference: MUTCD Part 4; HCM (7th ed.) signalized delay and LOS; ITE change interval; Synchro/HCS for detailed design. Concept depth: detector layout, pedestrian timings, coordination and the signal plan are by the traffic signal engineer.

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Traffic signals: warrant, phasing and timing (X1 at 0+570.00)

DRAWING / SHEET No.
C-706

SHEET / REVISION / DATE OF ISSUE
Sheet 34 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 6639279720 9ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.

Scale as shown (not to scale)

NOTES / KEY PLAN

PROFESSIONAL ENGINEER SEAL

NO SEAL - PRELIMINARY

Movement	v veh/h	vc veh/h	tc s	tf s	c veh/h	v/c (RFC/DOS)	Delay s	LOS
Mainline link	760				1700	0.28		B
minor left (NB)	70	700	7.1	3.5	357	0.20	17.5	C
minor right (NB)	60	330	6.2	3.3	716	0.08	10.5	B
major left (EB)	40	335	4.1	2.2	1236	0.03	8.0	A

Link: V = 760 veh/h, D = 0.55, PHF = 0.92, P_T = 6 %, E_T = 2.0 → f_HV = 0.943, v_p = 482 pc/h; capacity 1700 pc/h/ln × 1; engineer v/c → LOS table (two-lane; HCM 7 follower-density method not reproduced).
Reference: HCM 7th ed.: PCE/f_HV, basic-segment density LOS, TWSC gap-acceptance capacity and control delay. All demand volumes, PHF, E_T, capacity and gap parameters are engineer inputs (DEMO VALUE - engineer to replace).
Concept screening only: the agency's capacity software (HCS, Synchro, SIDRA, LINSIG, PICADY/ARCADY) governs the detailed design.

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Capacity and level of service (concept)

DRAWING / SHEET No.
C-605

SHEET / REVISION / DATE OF ISSUE
Sheet 35 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 66392797209ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.


Scale as shown (not to scale)

NOTES / KEY PLAN

PROFESSIONAL ENGINEER SEAL

NO SEAL - PRELIMINARY

JRCP base 225 mm on subbase (k 70 MPa/m)



Group	P/tyre kN	σ MPa	Sr	Nf	Fatigue %	Erosion %
SAST 53 kN	31.8	1.73	0.383	inf	0.0	42.2
SADT 80 kN	24.0	1.39	0.309	inf	0.0	36.1
TADT 135 kN	20.2	1.22	0.271	inf	0.0	0.9
TRDT 181 kN	18.1	1.12	0.248	inf	0.0	0.0

non-AU/NZ project: shown for comparison only; the agency rigid method governs (AASHTO 93 / DMRB CD 226 / provincial). Thickness 225 mm: fatigue 0.0 %, erosion 79.2 % (≤ 100 %); trials from 150 mm in 5 mm steps.
Method: Austroads AGPT02 (2017) Ch. 9 procedure structure; fatigue Sr relation as AGPT02/PCA (1984); Westergaard edge stress (Ioannides, Thompson & Barenberg 1985); PCA (1984) erosion. AGPT02 equivalent-stress / erosion-factor tables are not shipped (copyright): confirm the thickness with AGPT02 Tables 9.x or the agency procedure.
Inputs (engineer, DEMO VALUE - engineer to replace): axle-group spectrum, LSF 1.20, effective subgrade support k 70 MPa/m, E 30000 MPa, ν 0.15.

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Rigid pavement (AGPT02 Ch. 9 structure, concept)

DRAWING / SHEET No.
C-505

SHEET / REVISION / DATE OF ISSUE
Sheet 36 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 6639279720 9ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.

Scale as shown (not to scale)

NOTES / KEY PLAN

PROFESSIONAL ENGINEER SEAL

NO SEAL - PRELIMINARY

Stage	Activities
1 Enabling	survey control, site compound and lay-down within the land requirement, stabilised construction entrances, ESC perimeter controls (sediment fence, check dams) before any earthworks
2 Utilities	4 utility conflicts in the register: protect / relocate before earthworks; pothole (QL-A) the QL-B/C/D records first
3 Drainage first	2 culverts installed before the embankment over them (temporary stream diversion, dry season); outlet protection at the same time
4 Walls	MSE 5 sections built with the embankment (lift by lift, compaction control in the reinforced zone, select fill); cantilever 3 sections cast before backfilling; soil nail 0 sections top-down in the cut
5 Earthworks	cut-to-fill along the mass haul; fill in lifts with compaction testing; benches every 8 m on high slopes
6 Pavement	subgrade proof-roll, subsurface drains, base and asphalt; max grade 8.0 % (above the paving limit: echelon paving / material transfer vehicle, cooling of asphalt on the grade)
7 Traffic staging	4 TTM stages; tie-ins under lane closure at night / off-peak
8 Signals	ducts and pits with the kerb/drainage works; temporary signals or flagging during the tie-in; commissioning after the final surface
9 Finishing	marking and signing, lighting, landscape (planting season), removal of temporary ESC after 70 % cover

Type	Item	Action
HOLD	MSE walls up to 16.3 m	foundation settlement and global stability: geotechnical investigation, instrumentation and supplier design before tender
risk	slopes: minimum FS 1.40	temporary slopes during construction are steeper/wetter than the final case: limit open cut length, drain before rain
risk	land: footprint 34815 m²	temporary working space and lay-down outside the permanent take need licences / temporary easements
risk	ground conditions	no site investigation in the design data: all geotechnical inputs are placeholders until the GI report

Concept constructability review generated from the design (constructability.md). Temporary works and programme by the contractor.

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Constructability: sequence and risks

DRAWING / SHEET No.
C-707

SHEET / REVISION / DATE OF ISSUE
Sheet 37 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 6639279720 9ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.

Scale as shown (not to scale)

NOTES / KEY PLAN

PROFESSIONAL ENGINEER SEAL

NO SEAL - PRELIMINARY


D1 Curb and gutter



Reference: State DOT standard plan; FP-14 Section 609

Schematic only - not to scale. Use the referenced standard drawing.

D2 W-beam guardrail

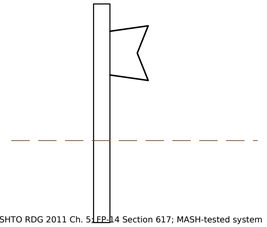

Reference: AASHTO RDG 2011 Ch. 5; FP-14 Section 617; MASH-tested system

Schematic only - not to scale. Use the referenced standard drawing.


D3 Riprap / ditch lining



Reference: HEC-15 (2005); FP-14 Sections 251, 629

Schematic only - not to scale. Use the referenced standard drawing.


D4 Pipe trench and bedding



Reference: FP-14 Section 602; pipe manufacturer / AASHTO LRFD Sec. 12

Schematic only - not to scale. Use the referenced standard drawing.


D5 Manhole



Reference: FP-14 Section 604; state DOT standard plan

Schematic only - not to scale. Use the referenced standard drawing.


D6 Grate inlet



Reference: HEC-22 (2009) inlet capacity; FP-14 Section 604

Schematic only - not to scale. Use the referenced standard drawing.


D7 Pavement edge / shoulder



Reference: AASHTO 93 design; FP-14 Sections 301, 401

Schematic only - not to scale. Use the referenced standard drawing.

D8 Sidewalk



Reference: FP-14 Section 615; PROWAG accessibility

Schematic only - not to scale. Use the referenced standard drawing.

OWNER LOGO

Demo County Public Works (fictitious)

PROJECT
Demo rural collector (USGS 3DEP terrain, Palo Alto CA)

CLIENT / CONTRACT
Demo County Public Works (fictitious) Contract DEMO-001

SHEET TITLE
Standard details atlas (references)

DRAWING / SHEET No.
C-506

SHEET / REVISION / DATE OF ISSUE
Sheet 38 of 38 Rev A 2026-10-20

DOCUMENT TYPE / SHEET SIZE
Road design drawing - ANSI D landscape

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK	APP
A	2026-10-20	Preliminary design for review	AGT		

DESIGNED
civil-mcp agent (engineer-directed)

DRAWN (CREATOR)
civil-mcp agent tools

CHECKED

APPROVED (APPROVAL PERSON)
REVIEWER-PLACEHOLDER - not yet approved

PRELIMINARY - NOT FOR CONSTRUCTION
Checks 288/288 pass; audit 6639279720 9ed17c
Design standard: US_AASHTO_2018
Drafting profile: US
A1 layout at 91.6% on ANSI D: use the scale bar.

Scale NTS (not to scale)

NOTES / KEY PLAN

PROFESSIONAL ENGINEER SEAL

NO SEAL - PRELIMINARY